

job name:
 type:

bul.it™ fluorescent spec sheet

material

housing

precision CNC spun .063" aluminum parabolic housing with rolled bottom edge for added strength and matte anodized finish standard. optional powder coat paint finishes require the addition of a segmented reflector insert.

socket platform

.063" spun aluminum powder coat painted high reflective white.

bottom lens (optional)

.125" frosted acrylic with lamp access hole. concave installation recommended.

decorative ring (optional)

.125" colored acrylic ring. convex installation recommended.

optics

standard housing

.063" anodized matte finish to reduce lamp image.

painted housing


additional .020" segmented aluminum reflector insert in diffuse 949MD haze finish to reduce lamp image.

electrical

factory installed universal voltage (120-277v), thermally protected, class P, electronic ballast. white power cord is standard with other color options listed below.

mounting

5"dia. spun steel canopy in satin white with 6ft stainless steel cable tripod and field adjustable grippers that allow for exact AFF mounting heights.

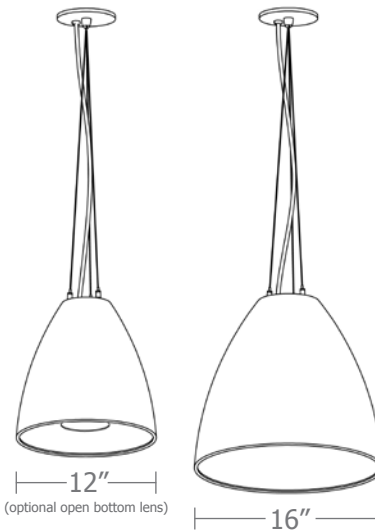

catalog number

--	--	--	--

size

P3312 12"dia X 12"ht

P3316 16"dia X 14"ht

lamping

(12")

126 1-26W CFTR
(labeled max.)

132 1-32W CFTR
(labeled max.)

142 1-42W CFTR
(interchangeable 26/32/42W)
(ies file #16213)
(with anodized insert, ies file #16215)

(16")

226 2-26W CFTR
(labeled max.)

232 2-32W CFTR
(labeled max.)

242 2-42W CFTR
(interchangeable 26/32/42W)

painted finishes




- AP** anodized paint
- BR** brick red
- BU** blue
- BZ** bronze
- CP** champagne
- MB** military blue
- MN** mint
- MW** matte white
- OR** orange
- RD** red
- SB** satin black
- SS** satin silver
- TG** textured gray
- TW** textured white
- YO** yellow

premium finish


- RAL** specify RAL#
- AN** silver anodized*
*min. order required

options

- EMCU** Bodine® emergency ballast
120-277v
Remote mounted at canopy; max. 5' suspension
- EMNLU** Bodine® emergency ballast
120-277v
mounted in-line above standard ballast housing
(not available with VHS)
- BKPC** Black power cord and canopy
- SBPC** Silver braid power cord and white canopy
- OBL** Open bottom lens
- DRA** amber decorative ring
- DRB** blue decorative ring
- DRF** frost decorative ring
- DRG** green decorative ring
- DRR** red decorative ring
- DRY** yellow decorative ring



Powder Coat Paint Finishes




MW matte white



SB satin black



YO yellow 1018



TW textured white



CP champagne



RD red 3020



AP anodized paint



BZ bronze



BU blue 5017



SS satin silver



BR brick red



OR orange 2011



TG textured gray



MB military blue



MN mint 6019

For accurate color verification, actual finish samples are available upon request.

Premium Finishes



RAL#

