

job name:   
 type:

## wht.wal™ LED spec sheet

### material

**trim ring**  
 precision CNC spun .063" aluminum. rolled bottom edge for added strength.

**diffuser**  
 .125" virgin white acrylic bottom/inner lens.

### optics

**reflector**  
 22 gauge aluminum powder coat painted high reflectance white.

### efficiency

constant current driver operates LED consistently, regulating the current flow through it to produce the most consistent light output and efficiency. constant current driver protects LEDs from voltage fluctuations in the building power system, eliminating stress from over voltage, inrush surges, and flicker from voltage fluctuations, assuring long service life.

### LED

custom LED board in 3000K, 3500K, or 4000K (80 cri). under normal operating conditions, the LEDs employed are rated for >36,000hrs L70 (6.8K) per IES TM-21 from LM-80 test data, and 71,000hrs L70 projected life. white power cord is standard with other color options listed below.

### driver

Roal Strato series, class 2 power unit, built-in active PFC function, universal input (120-277 vac), 10% minimum dimming level, PF >80, protections include short circuit, over current, over voltage and over temperature. wired for 0-10v dimming from factory.

### mounting

5"dia. spun steel canopy in satin white. four point vertical suspension of 12 ft long stainless steel cables attach to trim with field adjustable grippers that allow for exact AFF mounting heights. optional quadpod to single point cable suspension.

### emergency

emergency not available. if required, recommend use of inverter (by other).



## catalog number





### size

- P6326**  
 (2ft) 26"dia X 4"ht
- P6338**  
 (3ft) 38"dia X 5.5"ht
- P6348**  
 (4ft) 48"dia X 7"ht

### LED array

- 30LO** 3000K  
**30HI** 3000K
- 35LO** 3500K  
**35HI** 3500K
- 40LO** 4000K  
**40HI** 4000K

### finish


- AP** anodized paint  
**BR** brick red  
**BU** blue  
**BZ** bronze  
**CP** champagne  
**MB** military blue  
**MN** mint  
**MW** matte white  
**OR** orange  
**RD** red  
**SB** satin black  
**SS** satin silver  
**TG** textured gray  
**TW** textured white  
**YO** yellow







### options

- QPD** Quadpod hanging system  
**SBPC** Silver braid power cord and white canopy  
**BKPC** Black power cord and canopy

### Premium Finish


- BA** brushed aluminum  
**RAL** specify RAL#
- KNP** knotty pine  
**MED** mediterranean  
**MHG** mahogany  
**MPL** maple  
**WAL** walnut  
 (extended lead time typical for wood finishes)



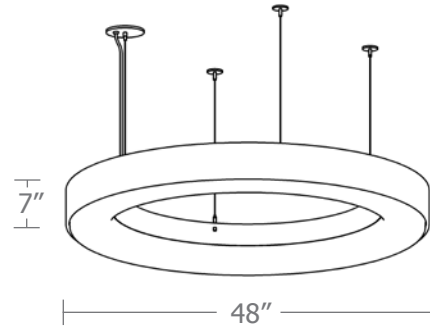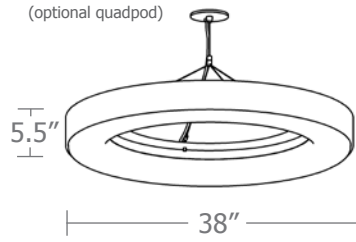


Cat No	Delivered Lumens	Watts		Amps	
		120V	277V	120V	277V
<b>P6326 LO</b>		29	29	0.24	0.10
4000K	2391				
3500K	2271	ies file # 19166			
3000K	1793				
<b>P6326 HI</b>		54	54	0.45	0.19
4000K	4452	ies file # 19611			
3500K	4424	ies file # 19610			
3000K	3339				
<b>P6338 LO</b>		33.4	33.4	0.28	0.12
4000K	2642				
3500K	2469	ies file # 19169			
3000K	1975				
<b>P6338 HI</b>		71.5	71.5	.60	0.26
4000K	5117	ies file # 19185			
3500K	4986	ies file # 19170			
3000K	3838				
<b>P6348 LO</b>		53.4	53.4	.45	0.19
4000K	3550	ies file # 19186			
3500K	3318				
3000K	2654				
<b>P6348 HI</b>		97.8	97.8	.82	0.35
4000K	5900	ies file # 19188			
3500K	5546				
3000K	4425				

## Powder Coat Paint Finishes




**MW** matte white



**SB** satin black



**YO** yellow 1018



**TW** textured white



**CP** champagne



**RD** red 3020



**AP** anodized paint



**BZ** bronze



**BU** blue 5017



**SS** satin silver



**BR** brick red



**OR** orange 2011



**TG** textured gray



**MB** military blue



**MN** mint 6019

For accurate color verification, actual finish samples are available upon request.

## Premium Finishes\*



**BA** brushed aluminum



**RAL#**



**MED** mediterranean



**KNP** knotty pine



**MPL** maple



**WAL** walnut



**MHG** mahogany

For accurate color verification, actual finish samples are available upon request.

\*Available on select series. Consult product spec sheet for availability.

(extended lead time typical for wood finishes)

