



ceiling mount  
**imago ii™ 5-slider**

your lighting rep has recommended  
the **ceiling mount imago ii™**  
fixture for your project  
Let's take a quick look:



## sizes and lumens



- C3108 (8") / 1630 – 4025 lm
- C3112 (12") / 1630 – 4025 lm
- C3116 (16") / 2120 – 5025 lm



ceiling mount

imago ii™ 5-slider




## construction

integral programmable driver, constant current, universal input (120-277v), field maintainable, 0-10v controllable, 1% dimming.

.063 spun aluminum parabolic reflector with rolled bottom edge for added strength. standard anodized paint finish, optional satin black.

white segmented internal reflector for optimal lumen efficiency

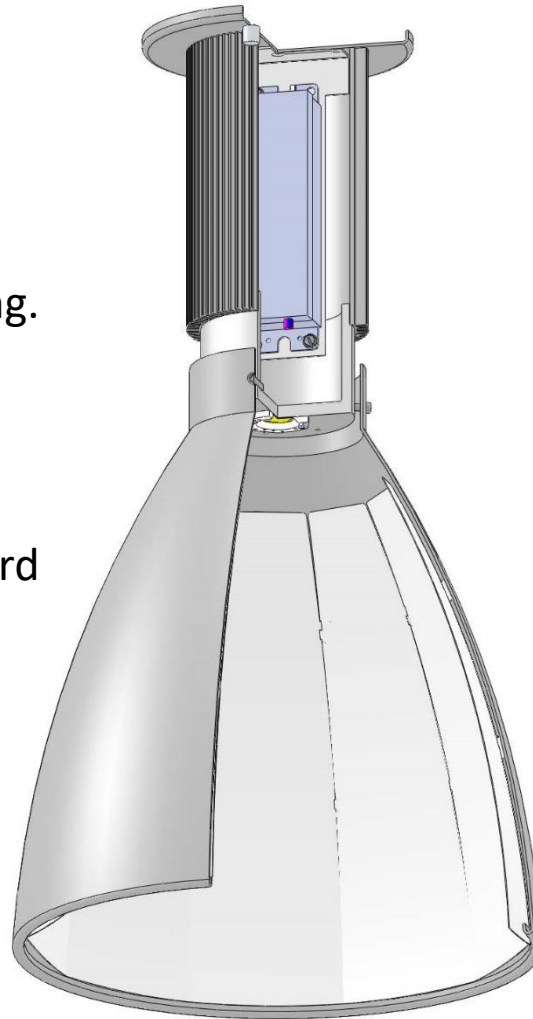

mounts to standard 4" octagon junction box

powerhead available in 2 anodized finishes and 12 standard powder coat painted finishes + custom RAL colors

single COB LED module **90+** CRI standard 2700K, 3000K, 3500K, and 4000K

optional flat frosted acrylic bottom lens


ceiling mount

imago ii™ 5-slider



# performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
imago.ii ceiling	+	24.3 fc	34.6 fc	16.0 fc	2.2:1	1.5:1

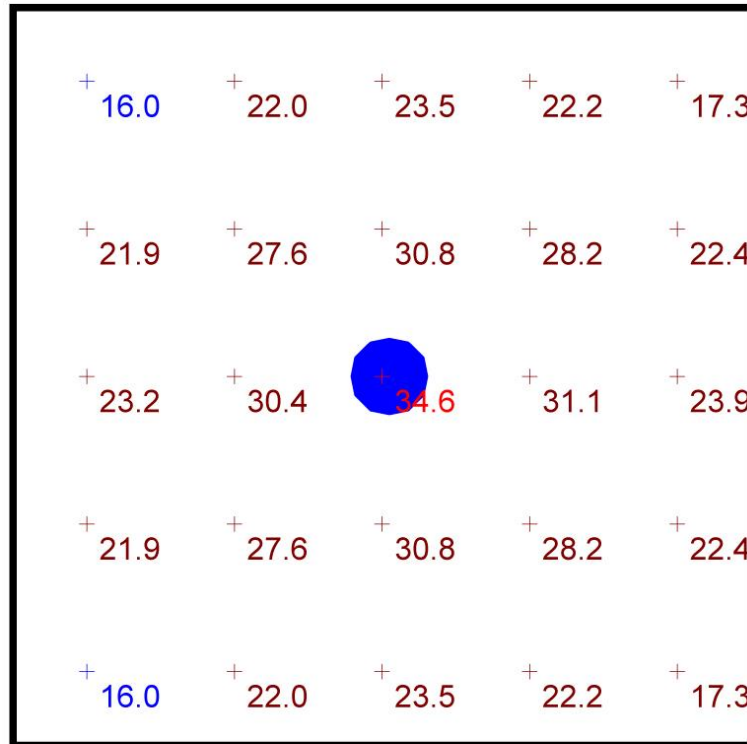

- 10' x 10' x 14'H space
- 80/50/20 reflectances
- bottom of fixture at 12' aff
- FC readings at 2.5' aff
- layout conducted using C3112 unit with HX lumen 90cri package providing 4025 delivered lumens

ceiling mount

Plan View  
Scale - 1" = 2ft

imago ii™ 5-slider





[www.impactltg.com](http://www.impactltg.com)

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

ceiling mount

imago ii™ 5-slider

