



ceiling mount
imago ii™ 5-slider

your lighting rep has recommended
the **ceiling mount imago ii™**
fixture for your project
Let's take a quick look:



sizes and lumens



- C3108 (8") / 1480 – 3900 lm
- C3112 (12") / 1480 – 3900 lm
- C3116 (16") / 2120 – 5000 lm



ceiling mount

imago ii™ 5-slider




construction

integral programmable driver, constant current, universal input (120-277v), field maintainable, 0-10v controllable, 1% dimming.

.064 spun aluminum parabolic reflector with rolled bottom edge for added strength

white segmented internal reflector for optimal lumen efficiency

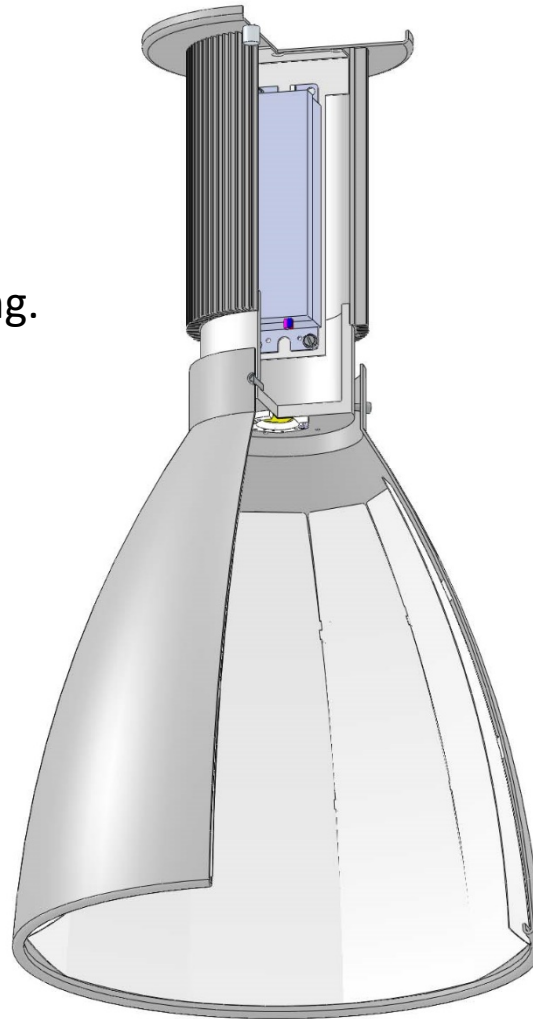

mounts to standard 4" octagon junction box

for powerhead:
18 standard powder coat painted finishes
+ custom RAL colors

single COB LED module in 80+ CRI standard or optional 90 CRI
2700K, 3000K, 3500K, and 4000K

optional flat frosted acrylic bottom lens

ceiling mount


imago ii™ 5-slider



performance

Statistics

Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
ceiling mount imago.ii	+	26.2 fc	41.2 fc	13.2 fc	3.1:1	2.0:1

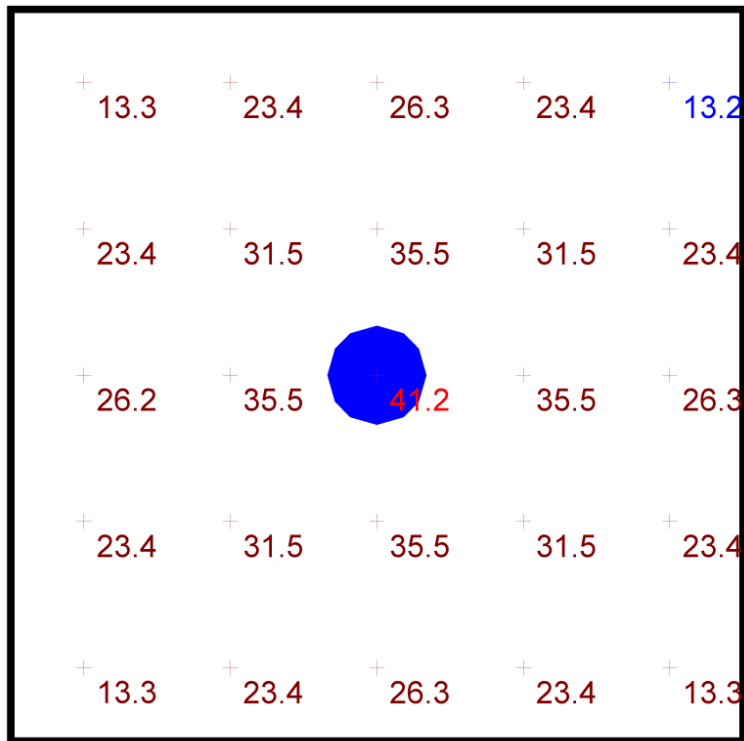

Plan View
Scale - 1" = 2ft

- 10' x 10' x 14'H space
- 80/50/20 reflectances
- bottom of fixture at 11'8" aff
- FC readings at 2.5' aff
- layout conducted using C3116 HI output (3900 delivered lumens)



ceiling mount

imago ii™ 5-slider





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

ceiling mount
imago ii™ 5-slider

