



design by Cornerstone Architectural Group | Roy Wright Inc. photographer




)(ula™ 5-slider

your lighting rep has
recommended the)(ula™
ring pendant for your project
Let's take a quick look:



sizes and lumens

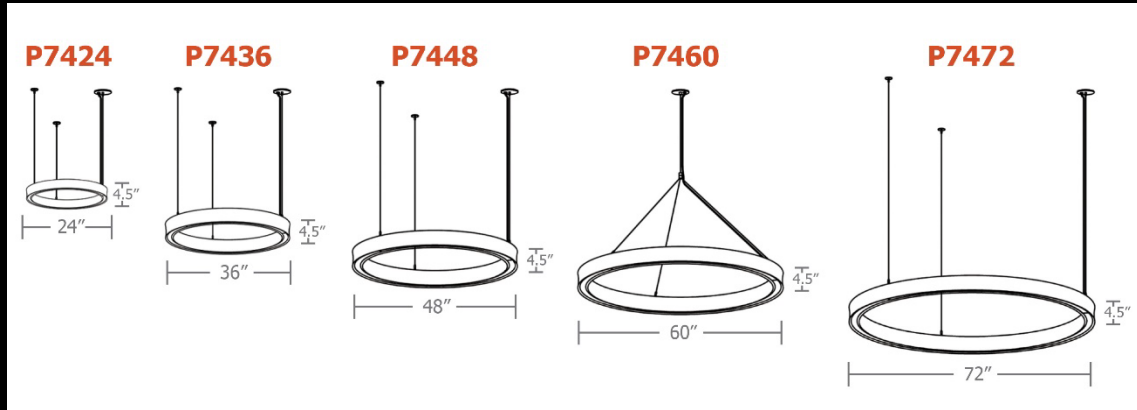

- P7424 (24") 6480 direct / 3110 indirect lm
- P7436 (36") 9720 direct / 4665 indirect lm
- P7448 (48") 12610 direct / 5940 indirect lm
- P7460 (60") 15840 direct / 8950 indirect lm
- P7472 (72") 20050 direct / 10610 indirect lm




construction

3-point vertical or single point + tripod mounting, utilizing 12' long stainless-steel cables w/ field adjustable grippers

.118" thick laser cut optimum light diffusion acrylic w/ 72% light transmission

integral programmable drivers, field maintainable, universal input (120-277v), 0-10v controllable, 1% dimming.

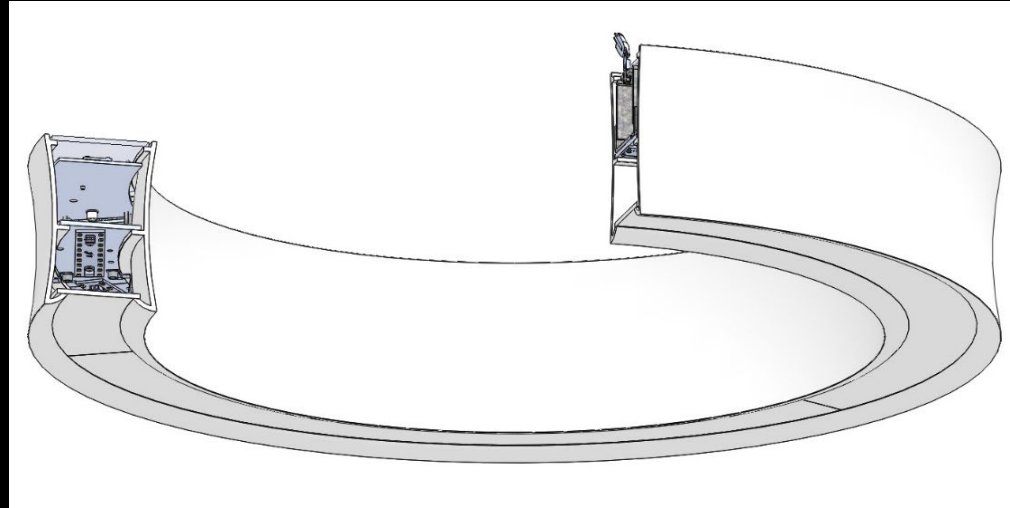

seamless single piece aluminum extrusion roll-formed into a perfect circle

custom 2-row LED board w/ high efficiency mid-power LEDs 3000K, 3500K, or 4000K **90+cri**


hourglass curved profile with a soft bullnose bottom return

matte white standard finish or choose premium finish RAL colors in gloss, semi-gloss or satin sheen

performance

Statistics

Description	Symbol	Avg	Min	Max/Min	Avg/Min	Max
(1) 6' dia.)(ula	+	26.8 fc	20.1 fc	1.8:1	1.3:1	36.1 fc

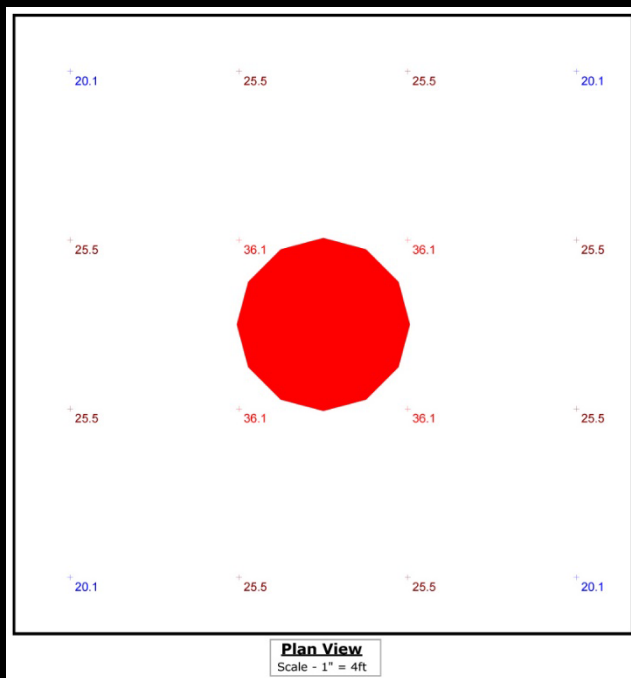

- 22' x 22' x 22'H space
- 80/50/20 reflectances
- bottom of fixture at 18' aff
- FC readings at 2.5' aff
- layout conducted using P7472 HI lumen package
90 cri (20050 direct / 10610 indirect delivered lumens)



www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 6-week lead time