




min!skrt™ 5-slider

your lighting rep has
recommended the **min!skrt™**
pendant for your project
Let's take a quick look:

sizes and lumens

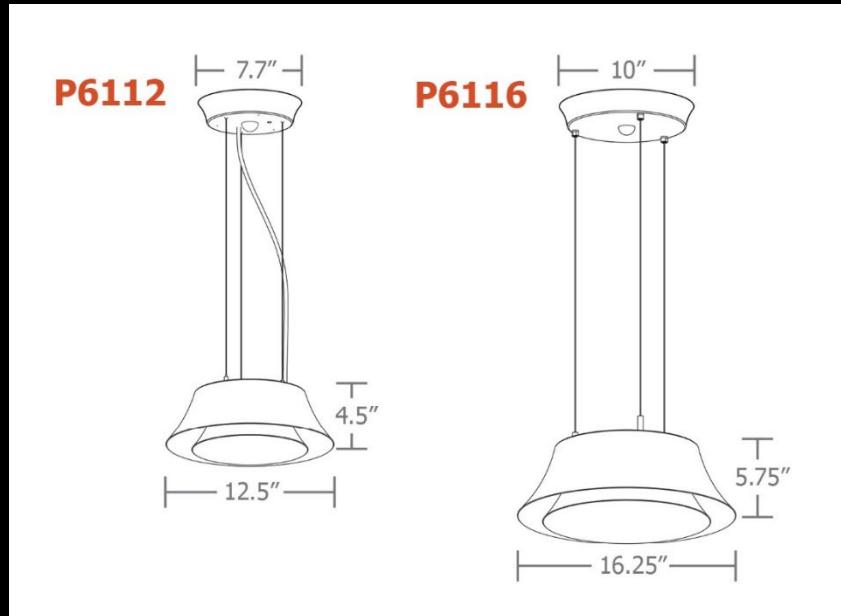

- P6112 (12") / 1001 – 2645 lm
- P6116 (16") / 2120 – 3970 lm




construction

canopy mounted , programmable driver, constant current, universal input (120-277v), field maintainable, 0-10v controllable to 1% dimming.

(POC) power over cable suspension system option (**shown here**) provides a clean look without the need for a separate power cord

3000K, 3500K or 4000K, **90 cri** metal core LED boards held in place mechanically for easy maintenance

precision CNC spun aluminum housing w/ aluminum liner powder coat painted in high reflectance matte white finish

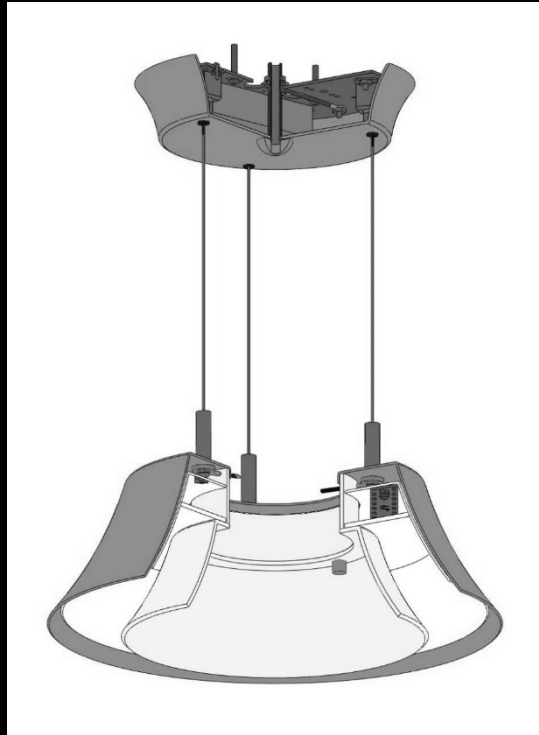

optional colored cloth power cord in blue, orange, purple, red or white & gray dot




If cloth cord selected, suspension is three ultra-thin vertical, stainless steel cables with field adjustable micro-grippers for exact AFF mounting height

15 standard powder coat paint finishes + custom RAL colors


diffuser available in either translucent white acrylic or spun aluminum powder coat painted in high reflectance matte white

performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
min!skrt - acrylic	+	32.1 fc	36.5 fc	26.3 fc	1.4:1	1.2:1

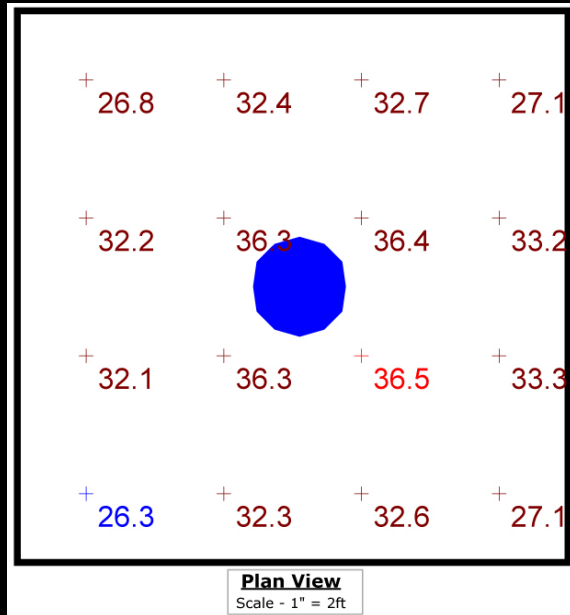

- 10' x 10' x 10'H space
- 80/50/20 reflectances
- bottom of fixture at 8' aff
- FC readings at 2.5' aff
- layout conducted using P6116-A, acrylic diffuser, HI lumen package (3920 delivered lumens) 90 cri

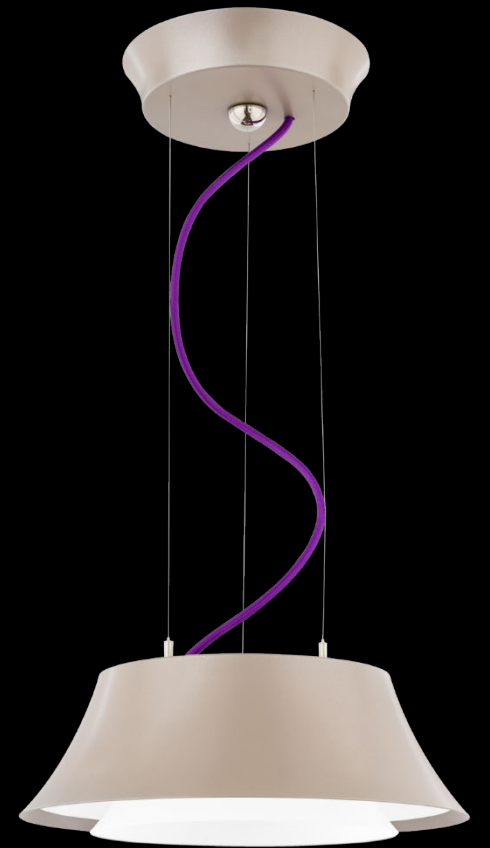



www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

min!skrt™ 5-slider

