




str.8™ 5-slider

your lighting rep has
recommended the **str.8™**
cylinder pendant for your project
Let's take a quick look:




sizes and lumens

P7508

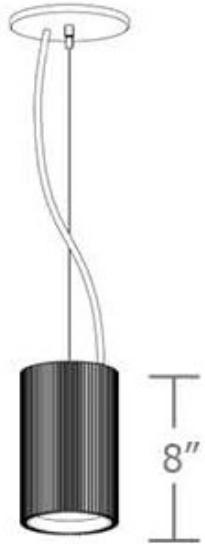

P7514

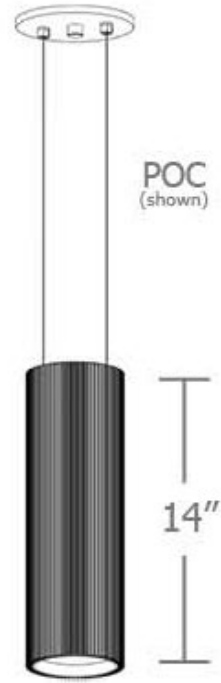

- P7506 (06") / 395 – 2780 lm
- P7512 (12.75") / 395 – 2780 lm



construction


driver mounted in J-box: constant current, field maintainable, universal input (120-277v), 0-10v controllable to 5% dimming
****2-1/8" deep J-box required (by other)**

(POC) power over cable suspension system option **(not shown)**, provides a clean look without the need for a separate power cord

4" dia. ribbed extruded aluminum outer housing

COB light engine in **90+ CRI** standard
2700K, 3000K, 3500K and 4000K.

field changeable downlight optics: 20° (spot), 30° (med), 50° (wide), 90° (extra wide) reflector with color mixing dome.

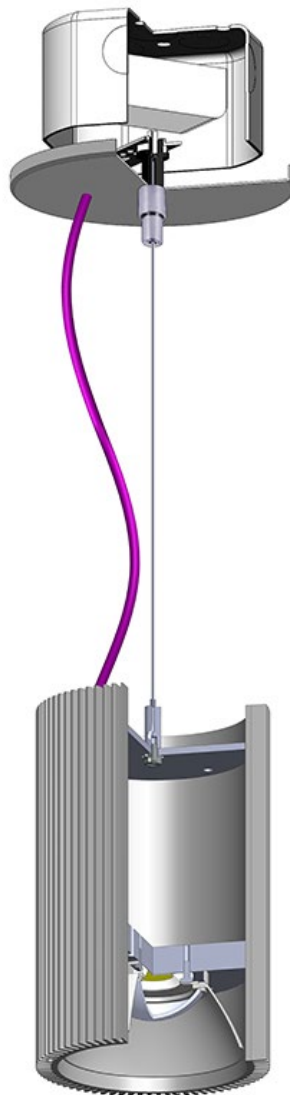

5" d canopy painted to match fixture
**optional CDVR – canopy mounted driver*


standard suspension: single stainless-steel ultra-thin cable with field adjustable micro-gripper allowing for exact desired mounting height

optional color cloth power cord **(shown here)**, available in blue, orange, purple, red or white & gray dot

available in 2 anodized finishes,
12 standard powder coat finishes
+ custom RAL colors

performance



Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
str8	+	27.1 fc	39.6 fc	18.5 fc	2.1:1	1.5:1

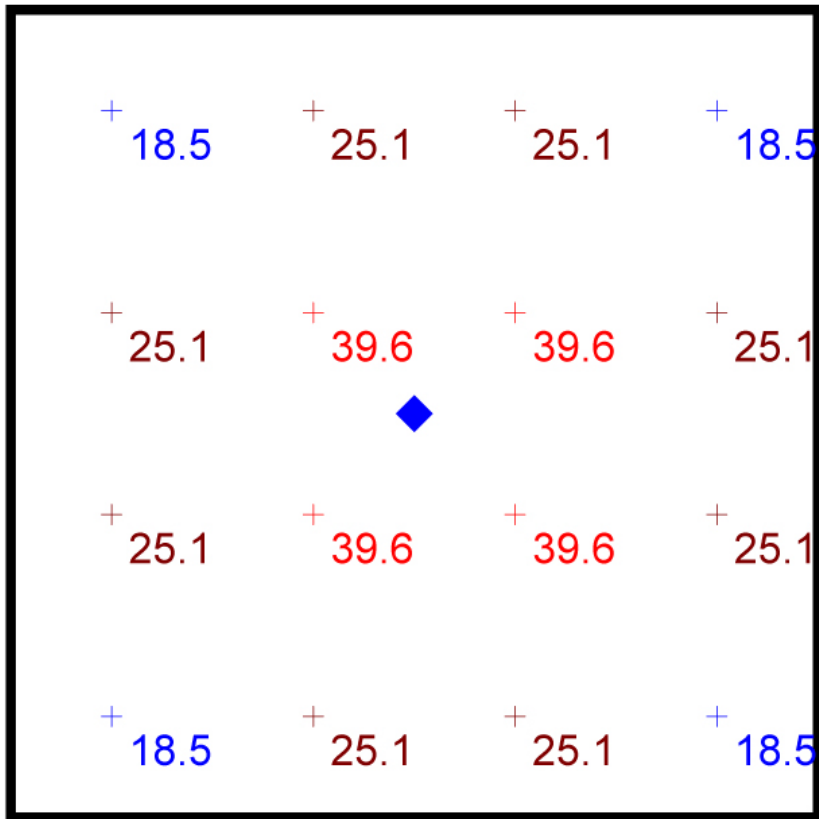

Plan View
Scale - 1" = 2ft

- 8' x 8' x 12'H space
- 80/50/20 reflectances
- bottom of fixture at 10' aff
- FC readings at 2.5' aff
- layout conducted using 12" length unit with 90 cri (H3) 2780 lumens with wide distribution lens



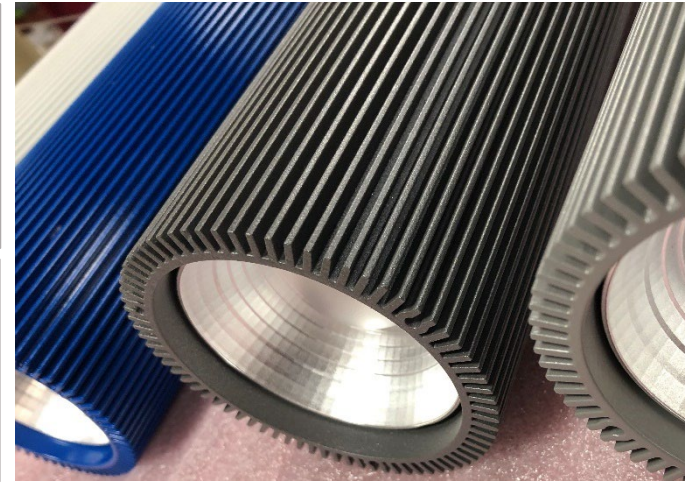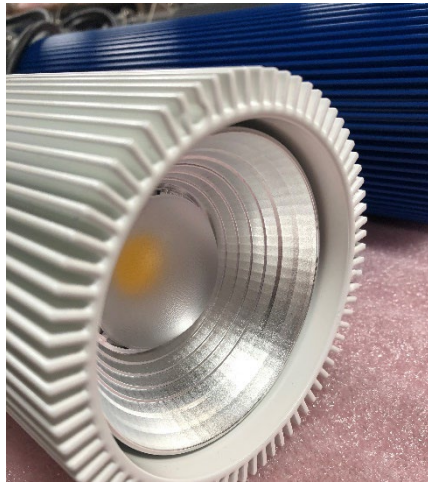

www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

str.8™ 5-slider

