




str.8™ 5-slider

your lighting rep has
recommended the **str.8™**
cylinder pendant for your project
Let's take a quick look:





sizes and lumens

P7506

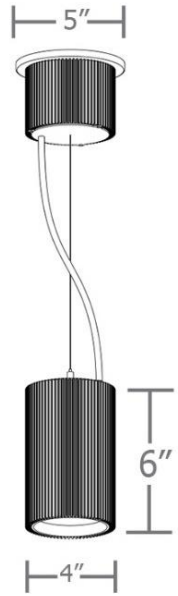

P7512

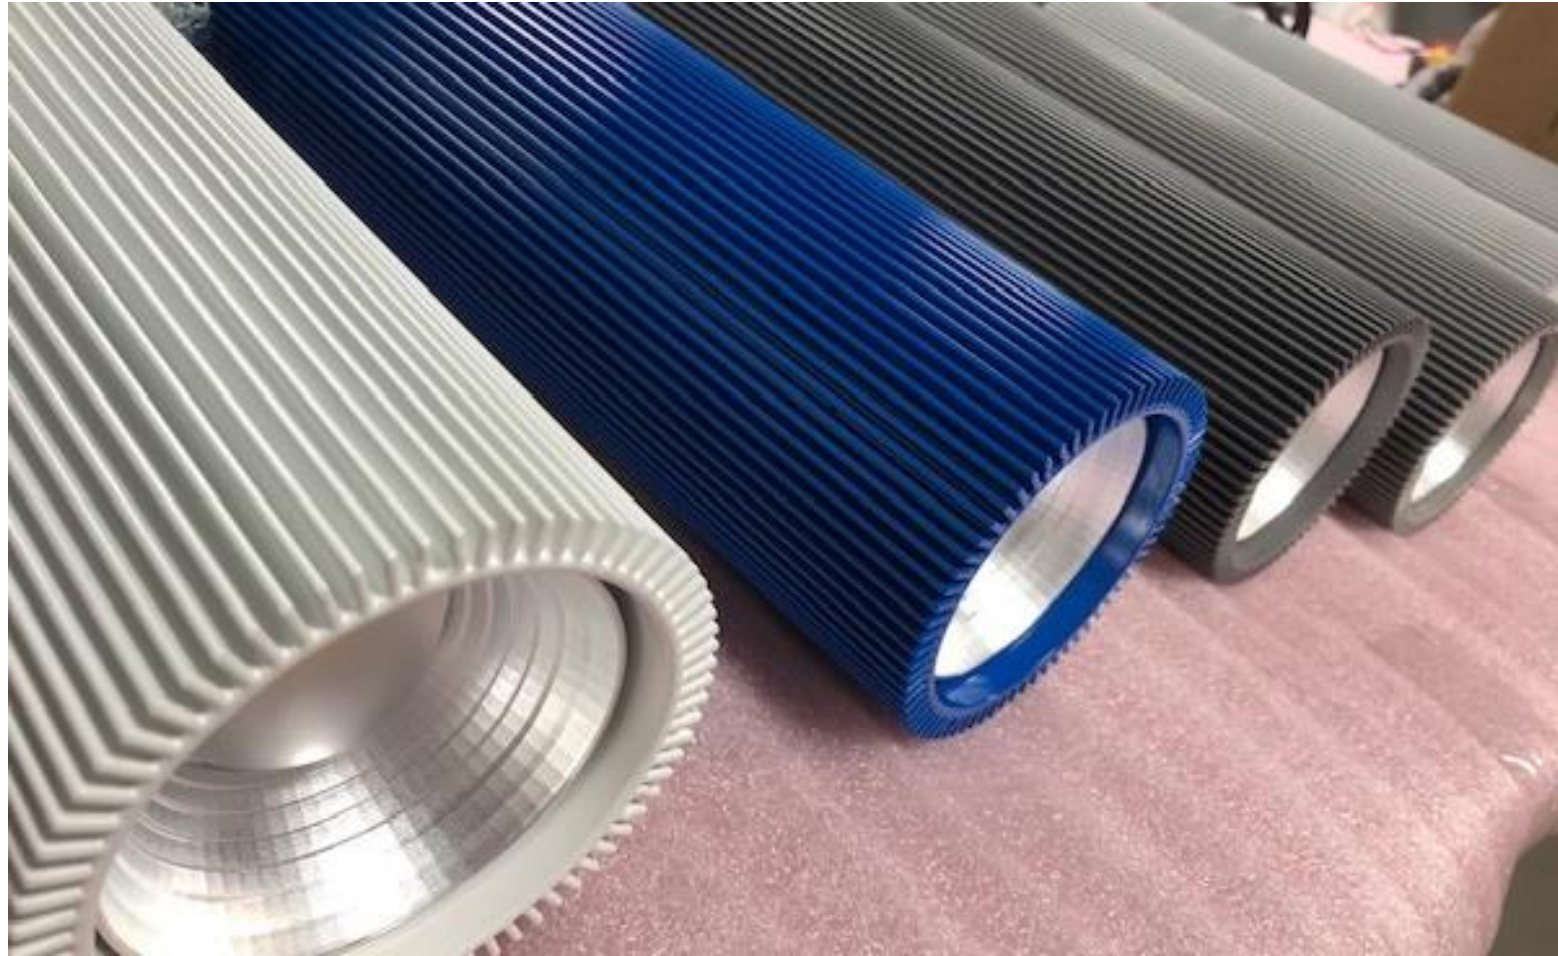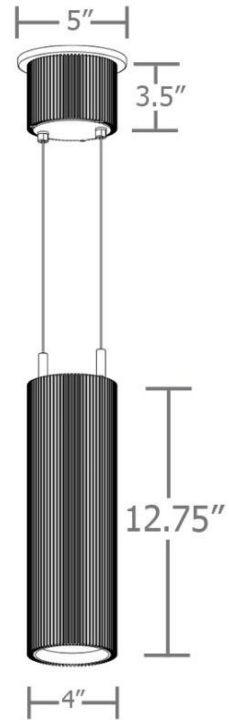

- P7506 (06") / 395 – 2780 lm
- P7512 (12.75") / 395 – 2780 lm


construction

canopy mounted driver, constant current, field maintainable, universal input (120-277v), 0-10v controllable to 5% dimming.

(POC) power over cable suspension system option provides a clean look without the need for a separate power cord

COB light engine in **90+ CRI** standard 2700K, 3000K, 3500K and 4000K.

4" dia. ribbed extruded aluminum outer housing

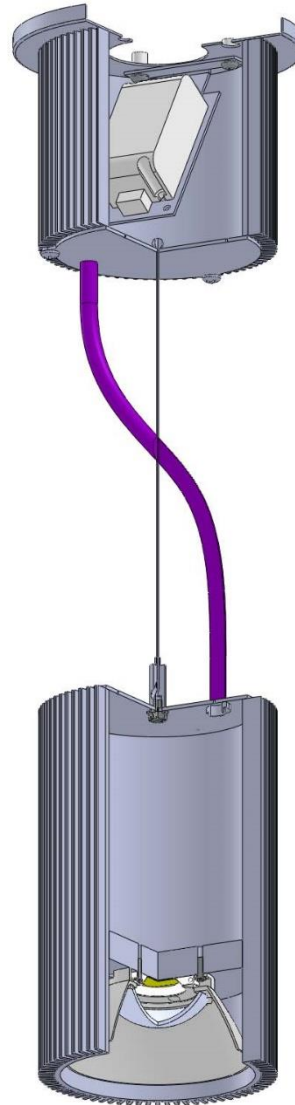

optional color cloth power cord (**shown here**), available in blue, orange, purple, red or white & gray dot


extruded aluminum driver canopy, painted to match fixture, holds stainless steel ultra-thin cable with field adjustable micro-gripper allowing for exact aff mounting

available in 2 anodized finishes, 12 standard powder coat finishes + custom RAL colors

field changeable downlight optics: 20° (spot), 30° (med), 50° (wide), 90° (extra wide) reflector with color mixing dome.

performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
str8	+	27.1 fc	39.6 fc	18.5 fc	2.1:1	1.5:1



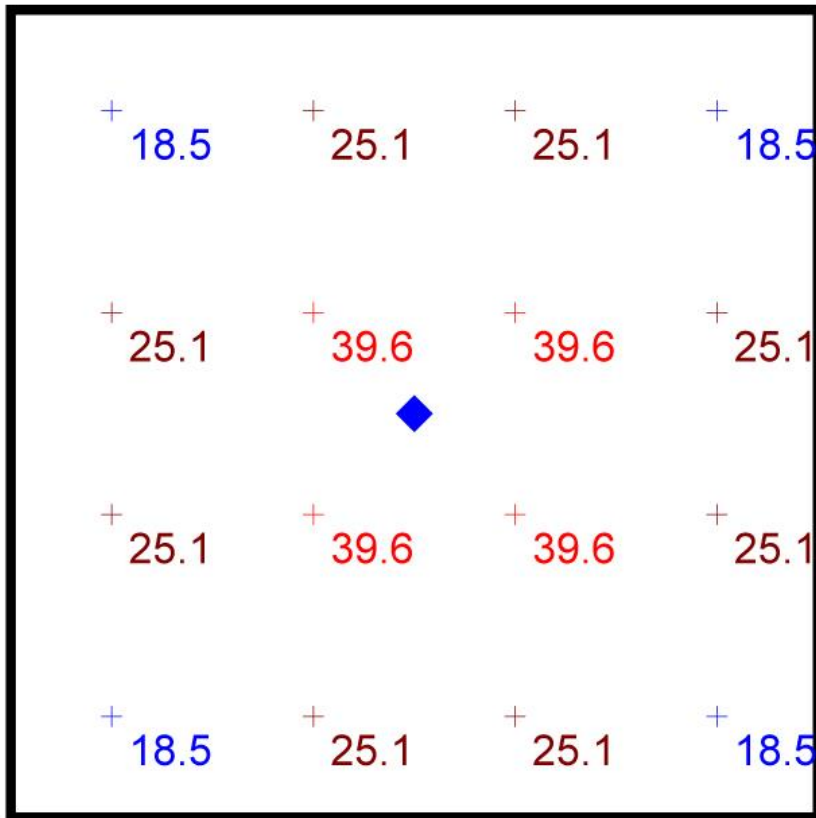


Plan View
Scale - 1" = 2ft

str.8™ 5-slider

- 8' x 8' x 12'H space
- 80/50/20 reflectances
- bottom of fixture at 10' aff
- FC readings at 2.5' aff
- layout conducted using 12" length unit with 90 CRI (H3) 2780 lumens with wide distribution lens



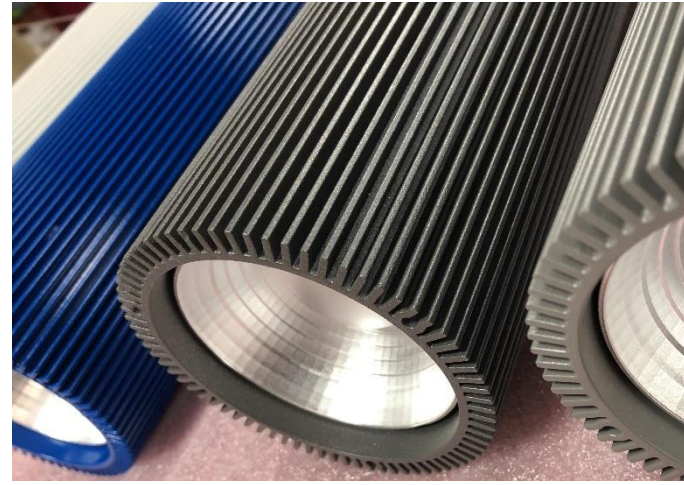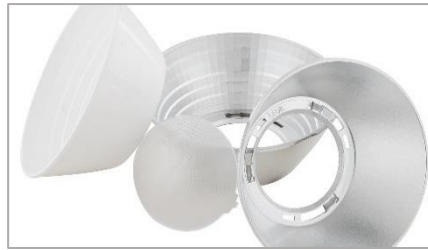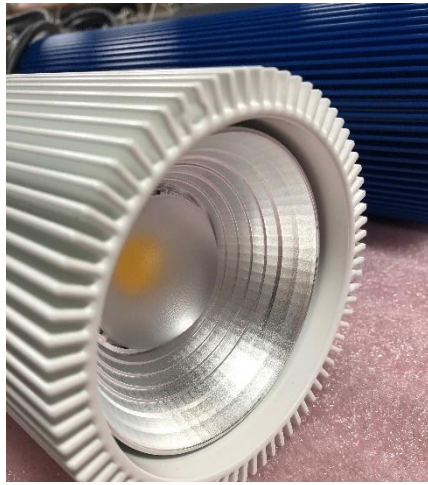

www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

str.8™ 5-slider

