




i.rod.4™ 5-slider

your lighting rep has  
recommended the **i.rod.4™**  
cylinder pendant for your project  
Let's take a quick look:



## sizes and lumens

**P9312**   **P9324**   **P9336**   **P9348**   **P9372**

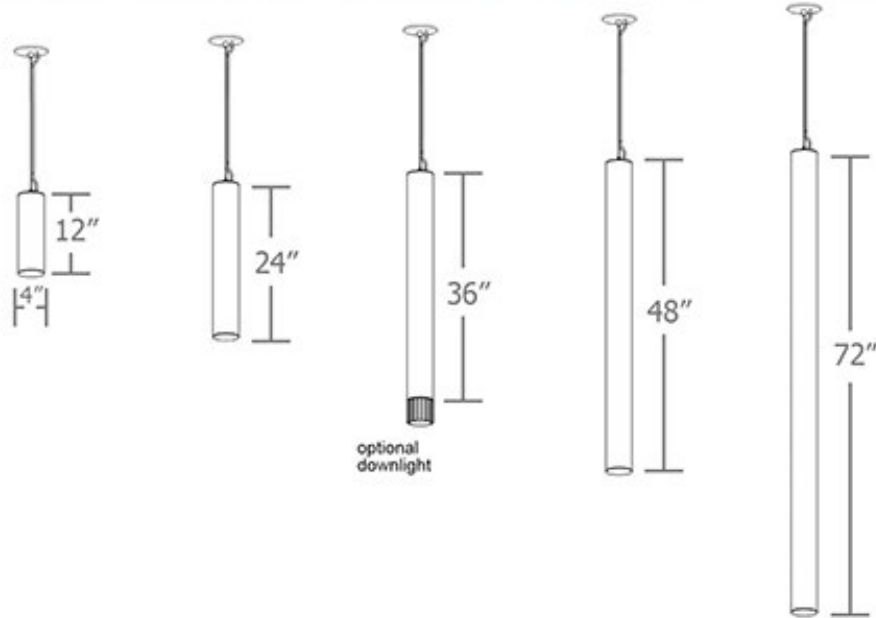


- P9312 (1ft) / 995 – 1400 lm
- P9324 (2ft) / 1400 – 3200 lm
- P9336 (3ft) / 1400 – 4570 lm
- P9348 (4ft) / 1900 – 6450 lm
- P9372 (6ft) / 3000 – 9100 lm




## construction

mounts to 5" dia. alum. canopy in matte white finish. single 6ft/12ft stainless steel cable. adj. gripper allows for exact desired mounting height

optional: CDVR

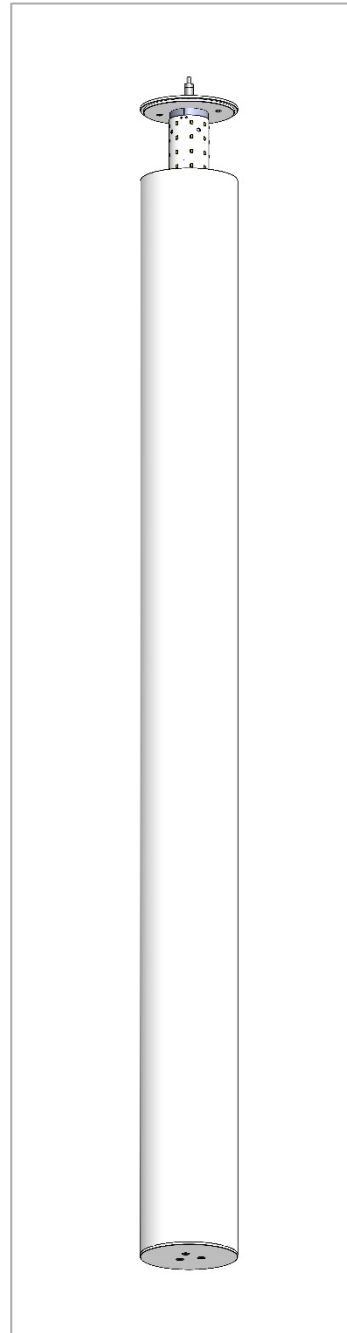


remote driver enclosure standard, constant current, field maintainable, universal input (120-277), 0-10v controllable to 1% dimming.

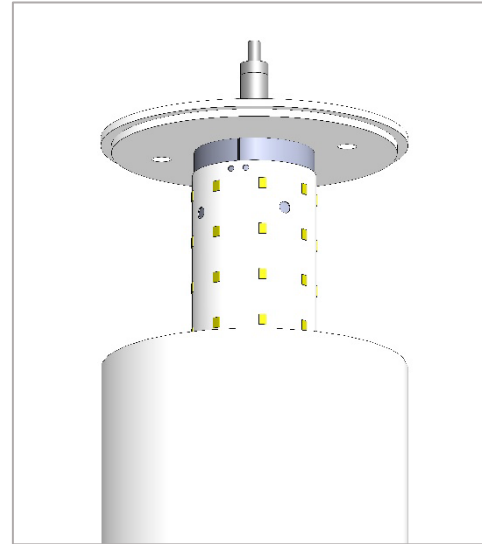


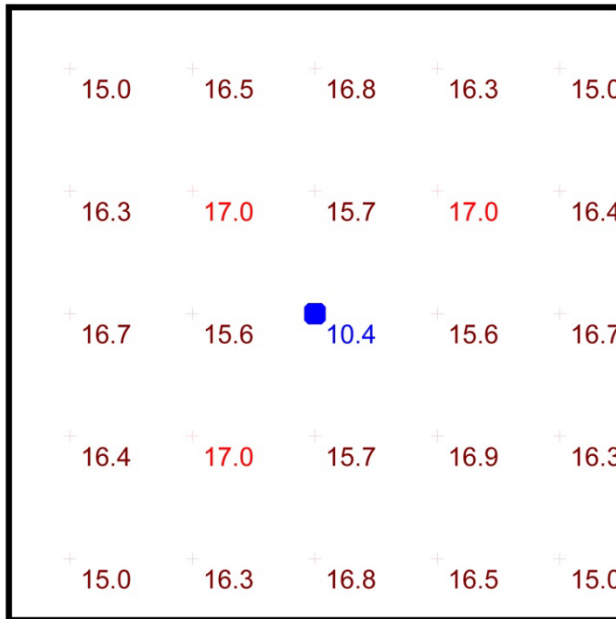
**90 cri** flexible planar LED lighting sheet wrapped around extruded aluminum core provides totally even luminance

end caps comprised of two graduated dia. .100" thick alum. plates. designed to center the acrylic and block light leaks.

# performance

Schedule						
Symbol	Quantity	Manufacturer	Catalog Number	Description	Lamp	Wattage
	1	Impact Architectural Lighting	P9372 40 HX	4" dia. x 72" length luminous cylinder i.rod.4	4000k 90cri LED	79


Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
i.rod.4		16.0 fc	17.0 fc	10.4 fc	1.6:1	1.5:1



Plan View  
Scale - 1" = 2ft

- 10' x 10' x 10'H space
- 80/50/20 reflectances
- bottom of fixture at 8' aff
- FC readings at 2.5' aff
- layout conducted using **90 cri P9372-HX 7500 lm**



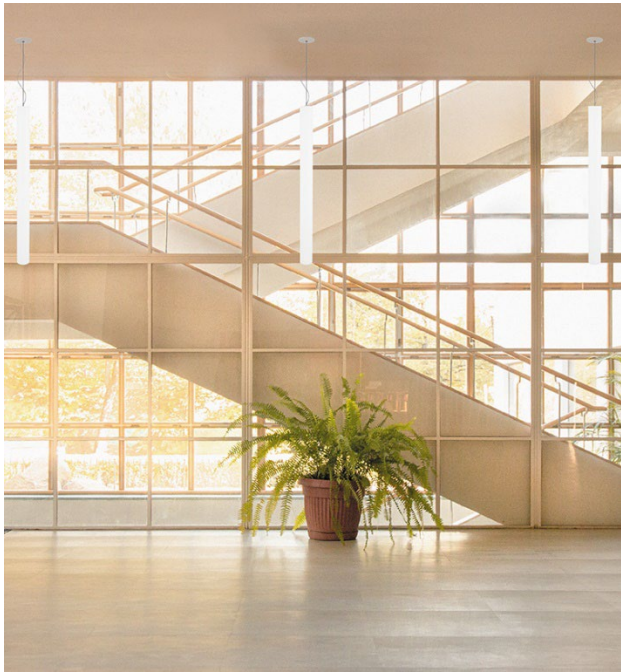

[www.impactltg.com](http://www.impactltg.com)

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

i.rod.4™ 5-slider

