



i.rod.4™ 5-slider

your lighting rep has
recommended the **i.rod.4™**
cylinder pendant for your project
Let's take a quick look:




sizes and lumens

P9324



P9348



P9372




- P9324 (24") / 1200 – 3200 lm (custom lumens)
- P9348 (48") / 2400 – 6450 lm (custom lumens)
- P9372 (72") / 3600 – 9100 lm (custom lumens)




construction

mounts to 7.7" dia. spun aluminum canopy in matte white finish via single 6ft/12ft stainless steel cable. field adjustable gripper allows for exact desired mounting height

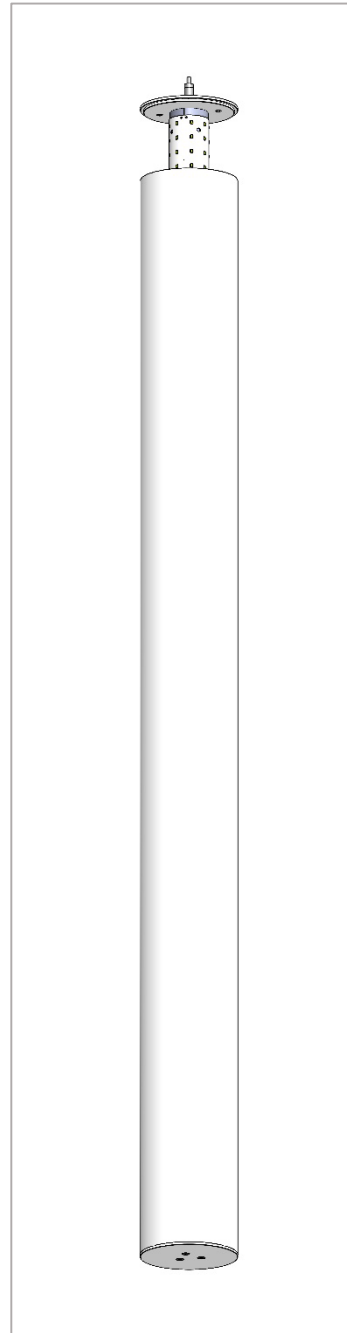

canopy mounted driver, constant current, field maintainable, universal input (120-277), 0-10v controllable to 1% dimming.

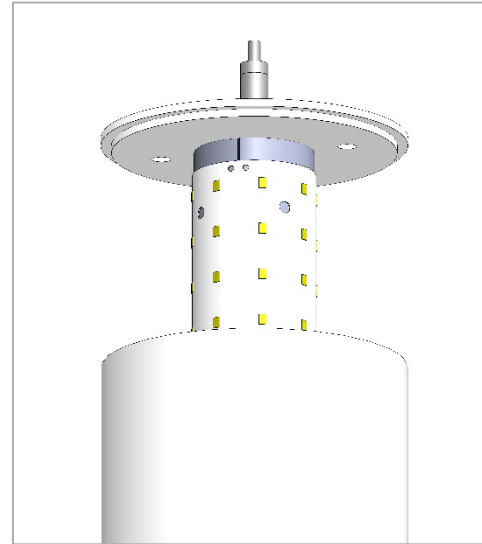

flexible planar LED lighting sheet wrapped around extruded aluminum core provides totally even luminance

.100" thick aluminum end cap in matte white

performance

Cat No	Delivered Lumens*	Watts		Amps	
		120V/277V	120V	277V	277V
P9324 LO	1200	13	0.12	0.05	
P9324 HI	2150	23	0.16	0.07	
P9348 LO	2400	25	0.21	0.09	
P9348 HI	4300	45	0.37	0.16	
P9372 LO	3600	38	0.31	0.14	
P9372 HI	6450	68	0.57	0.25	
P9372 HX	7500	79	0.66	0.29	

*preliminary delivered lumens based on 4000K, 90 cri





www.impacttg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

i.rod.4™ 5-slider

