




na.row.r™ 5-slider

your lighting rep has
recommended the **na.row.r™**
cylinder pendant for your project
Let's take a quick look:



sizes and lumens

P3906 **P3912** **P3918** **P3924**

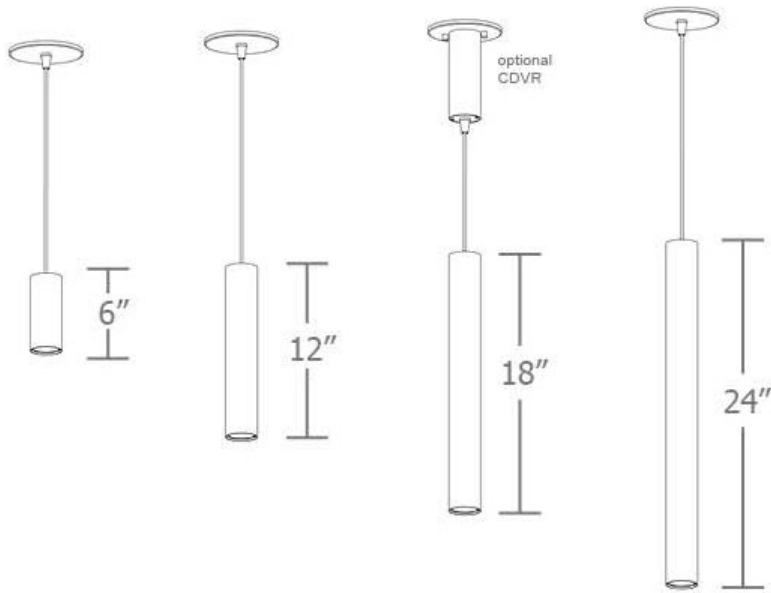

- P3906 (6") / 360 – 1805 lm
- P3912 (12") / 360 – 1805 lm
- P3918 (18") / 360 – 1805 lm
- P3924 (24") / 360 – 1805 lm
- consult factory for 36" + 48" long

na.row.r™



2" dia.

na.row.r™ 5-slider



construction

5" d canopy painted to match fixture
**optional CDVR – canopy mounted driver*

Optional colored cloth power cord in
blue, orange, purple, red or white &
gray dot

90cri LED COB in 2700K, 3000K, 3500K, and
4000K. field changeable standard downlight
optics: 12° (spot), 25° (med), and 38° (wide)



driver mounted in J-box: constant current,
field maintainable, universal input (120-
277v), 0-10v controllable to 5% dimming
****2-1/8" deep J-box required (by other)**


36" silver braid power cord standard.
allowing for exact desired mounting
height

2" dia. smooth extruded
aluminum outer housing

15 standard powder coat paint
finishes + custom RAL colors

performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
na.row	+	27.1 fc	39.6 fc	18.5 fc	2.1:1	1.5:1

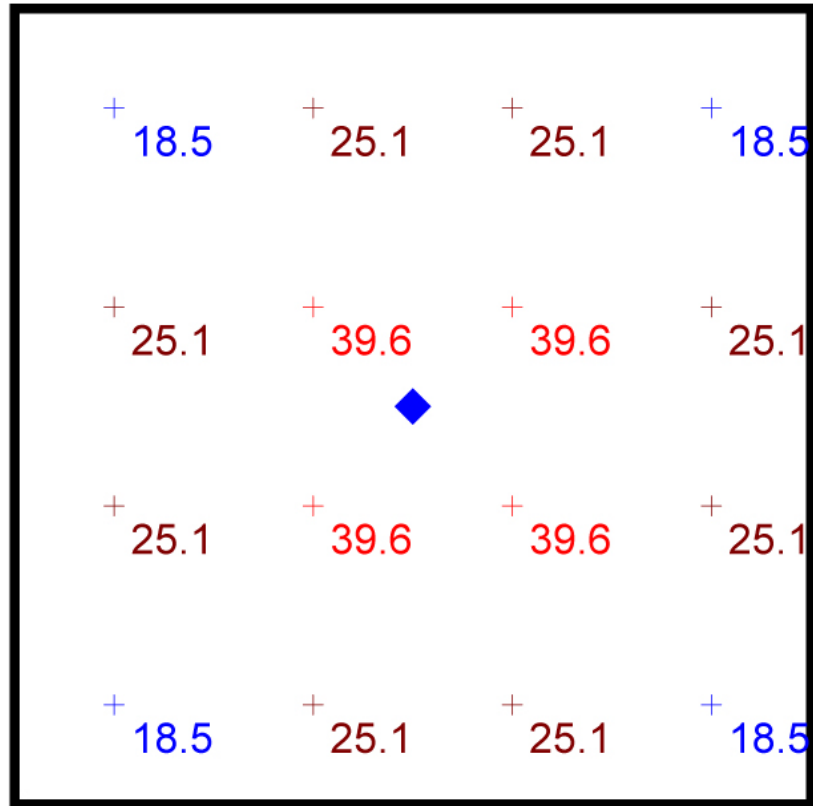

Plan View
Scale - 1" = 2ft

- 8' x 8' x 12'H space
- 80/50/20 reflectances
- bottom of fixture at 10' aff
- FC readings at 2.5' aff
- layout conducted using P3912-H2 unit with **90 cri** wide dist. 1805 lumen package





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

na.row™ 5-slider

