



sq.too™ 5-slider

your lighting rep has
recommended the **sq.too™**
cylinder pendant for your project
Let's take a quick look:




sizes and lumens


P4006




P4012

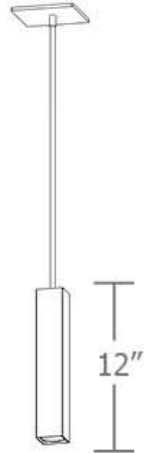

P4018

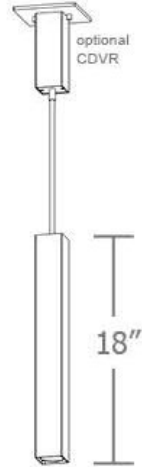

P4024

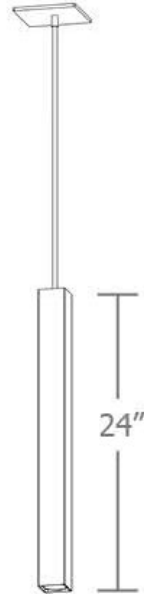

- P4006 (6") / 360 – 1805 lm
- P4012 (12") / 360 – 1805 lm
- P4018 (18") / 360 – 1805 lm
- P4024 (24") / 360 – 1805 lm
- consult factory for 36" + 48"long

construction

5" square canopy with universal mounting bracket for easy clocking, painted to match fixture

**optional CDVR – canopy mounted driver*

2" square smooth extruded aluminum outer housing

90cri LED COB in 2700K, 3000K, 3500K, and 4000K. field changeable standard downlight optics: 12° (spot), 25° (med), and 38° (wide)




driver mounted in J-box: constant current, field maintainable, universal input (120-277v), 0-10v controllable to 5% dimming
****2-1/8" deep J-box required (by other)**

sleek 3/8" od stem, painted to match fixture, required to allow clocking of fixture

15 standard powder coat paint finishes + custom RAL colors

performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
sq.3	+	24.6 fc	53.8 fc	13.2 fc	4.1:1	1.9:1

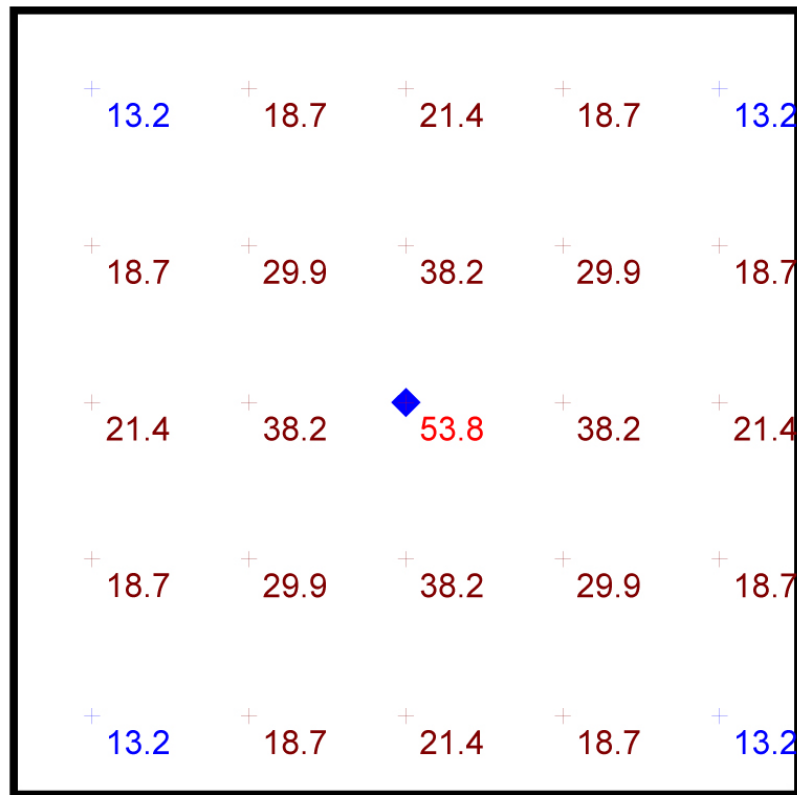

Plan View
Scale - 1" = 2ft

- 10' x 10' x 14'H space
- 80/50/20 reflectances
- bottom of fixture at 10' aff
- FC readings at 2.5' aff
- layout conducted using P4012-W-H2 output, 1805 delivered lumens w/ 38° beam spread





www.impacttg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

sq.3™ 5-slider

