



tiki.aura™ 5-slider

your lighting rep has recommended
the award winning
tiki.aura™ direct/indirect
pendant for your project
Let's take a quick look:




sizes and lumens


P4109



P4113

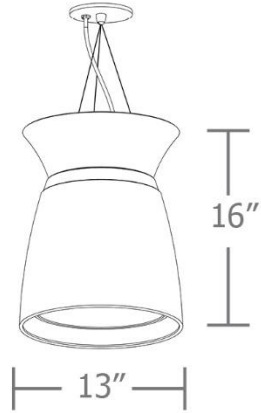

P4117

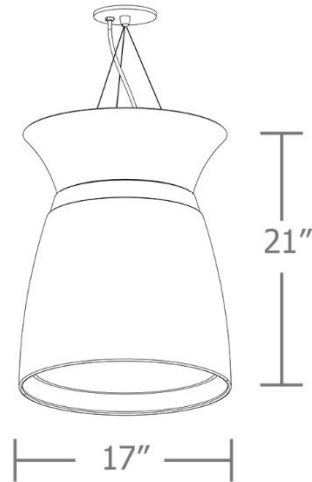

direct / indirect

- P4109 (9"): 995–2780 lm / 970 lm
- P4113 (13"): 1585–4120 lm / 775-1940 lm
- P4117 (17"): 2580–4985 lm / 775-2135 lm




construction

5" dia. mounting canopy with ultrathin stainless steel Wisp® cable tripod and tiny field adjustable grippers for exact mounting height

dual COB Direct/ Indirect light distribution
w/ dual circuit option
2700K, 3000K, 3500K, 4000K
90+ CRI standard

integral programmable drivers, field
maintainable, universal input (120-277v),
0-10v controllable to 1% dimming

15 standard powder
coat paint finishes
+ custom RAL colors

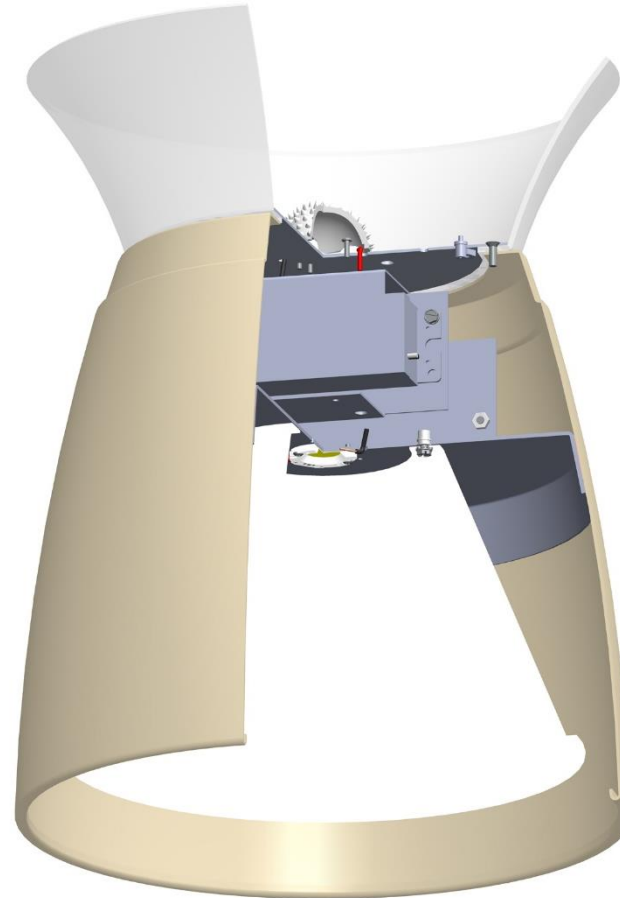


downlight portion either open
or optional flat frosted lens

translucent white acrylic
inverted bell up light element
gives tiki.aura its glow!


.050" spun aluminum conical
reflector finished in high reflectance
(>92%) matte white powder coat

precision CNC spun .063"
aluminum downlight housing
with rolled bottom edge for added
strength.

performance

Schedule						
Symbol	QTY	Manufacturer	Catalog Number	Description	Lamp	Wattage
	1	Impact Architectural Lighting LLC	P4117 40 HI 40 HI	17" dia. pendant tiki.aura luminaire w/ open bottom	4000k 90cri LED	68


Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
tiki.aura	+	33.1 fc	56.4 fc	24.2 fc	2.3:1	1.4:1

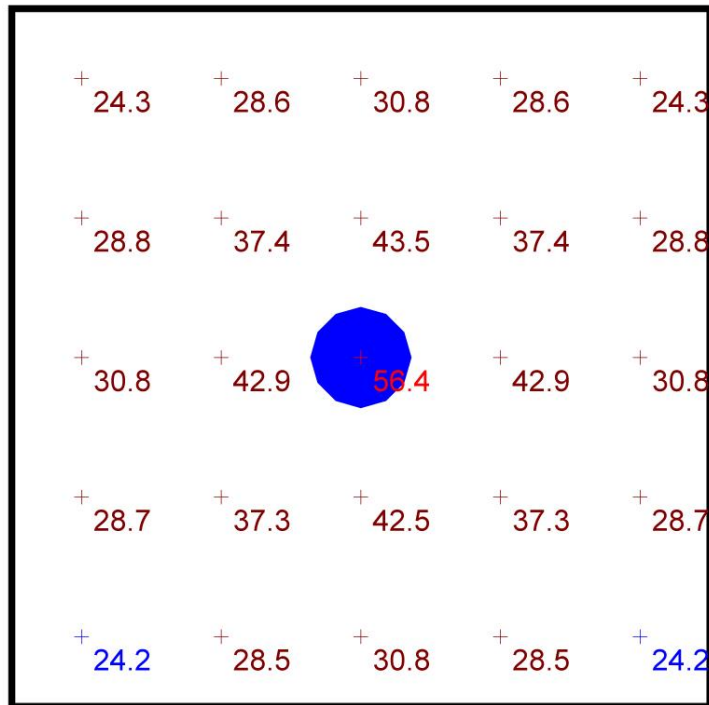

Plan View
Scale - 1" = 2ft

- 10' x 10' x 16'H space
- 80/50/20 reflectances
- bottom of fixture at 12' aff
- FC readings at 2.5' aff
- layout conducted using P4117-40HI-40HI lumen package (4550 lm direct/ 2135 lm indirect delivered lumens)



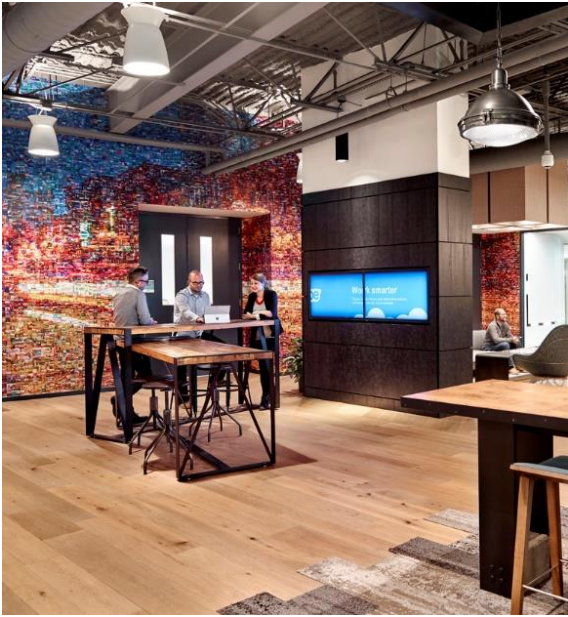

www.impactltg.com

- spec sheet and color chart
- photometric files
- built to order in Saint Louis, MO, USA
- 4-week lead time

tiki.aura™ 5-slider

