




**glo.stk.4.hrz™** 5-slider

your lighting rep has  
recommended the  
**glo.stk.4.hrz™** cylinder  
pendant for your project  
Let's take a quick look:

## sizes and lumens

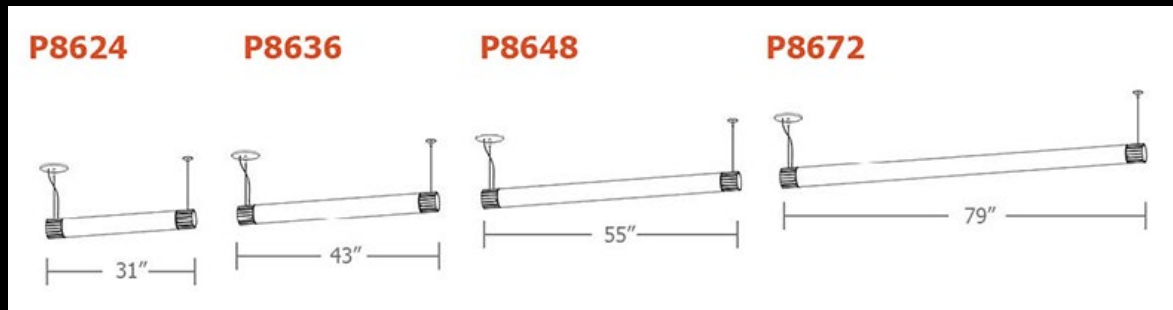

- P8624 (31"long) / 940 – 3200 lm
- P8636 (43"long) / 1400 – 4500 lm
- P8648 (55"long) / 1900 – 6450 lm
- P8672 (79"long) / 3000 – 9100 lm




## construction

driver in remote enclosure:  
constant current, programmable,  
field maintainable, universal  
input (120-277v), 0-10v  
controllable to 1% dimming

optional: CDVR



mounts to 5"dia. steel  
canopy in matte white  
finish.

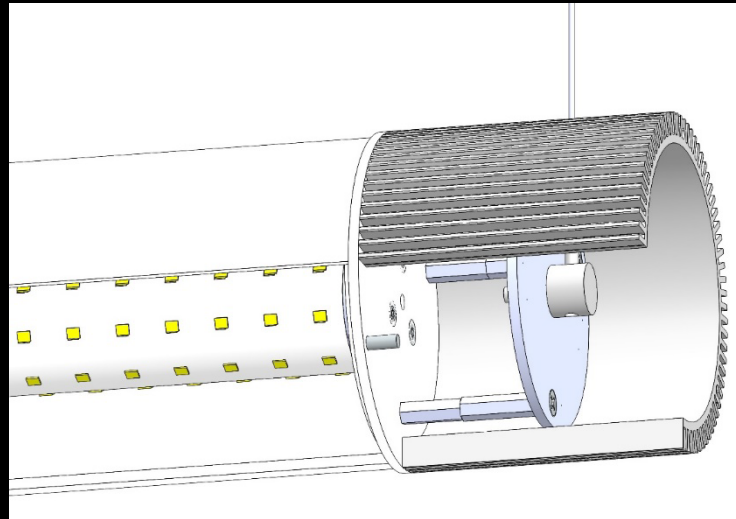

2-pt 3ft/6ft stainless steel  
cables, field adjustable  
grippers, exact desired  
mounting height.  
non power feed leg has 2"  
matte white canopy.

.100" thick aluminum end  
cap in matte white

90 cri flexible planar LED lighting sheet  
wrapped around extruded aluminum  
core provides totally even luminance


glo.stk.4.hrz™ 5-slider



# performance



## Statistics

Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
i.rod.4.hrz	+	29.1 fc	41.7 fc	22.0 fc	1.9:1	1.3:1

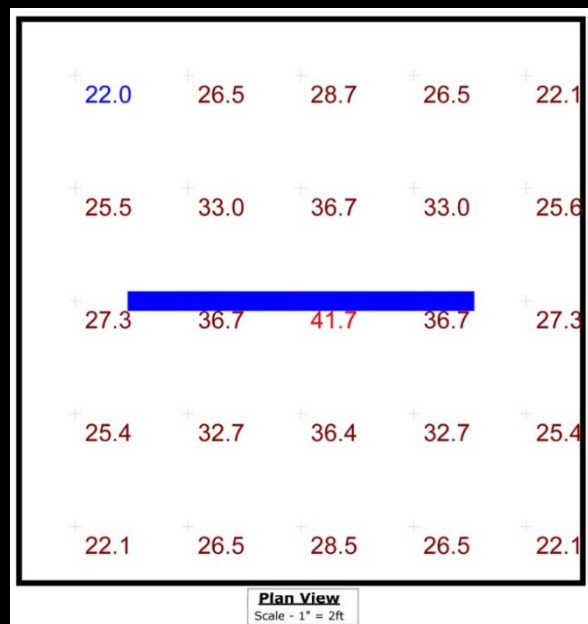

- 10' x 10' x 10'H space
- 80/50/20 reflectances
- bottom of fixture at 8' aff
- FC readings at 2.5' aff
- layout conducted using **90 cri** P8672-HX 7500 lumens



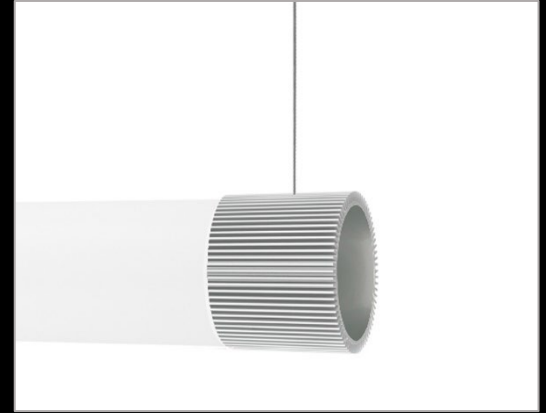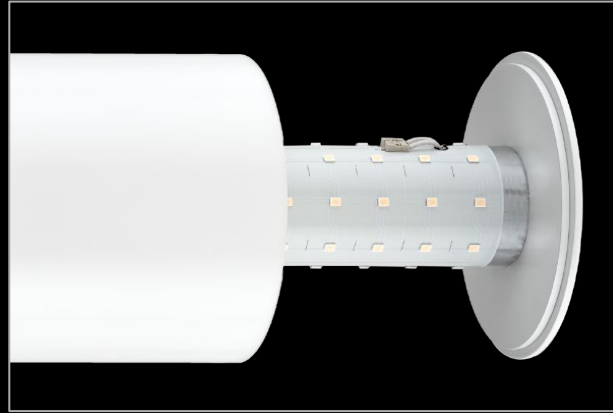

[www.impactltg.com](http://www.impactltg.com)

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

glo.stk.4.hrz™ 5-slider

