



glo.stk.4.hrz™ 5-slider

your lighting rep has
recommended the
glo.stk.4.hrz™ cylinder
pendant for your project
Let's take a quick look:




sizes and lumens

P8624


P8636

P8648

P8672

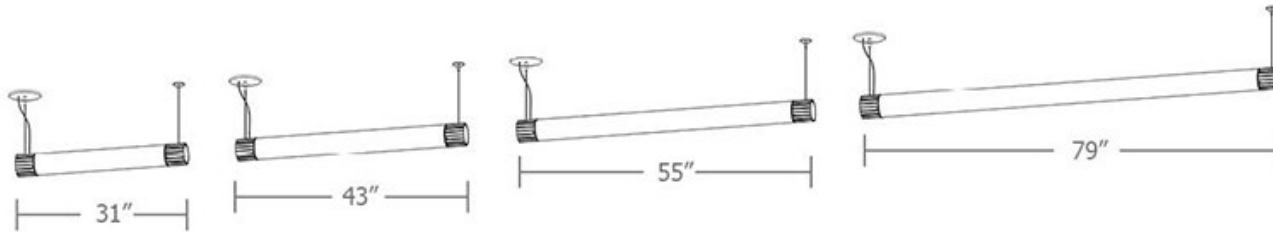

- P8624 (31"long) / 940 – 3200 lm
- P8636 (43"long) / 1400 – 4500 lm
- P8648 (55"long) / 1900 – 6450 lm
- P8672 (79"long) / 3000 – 9100 lm

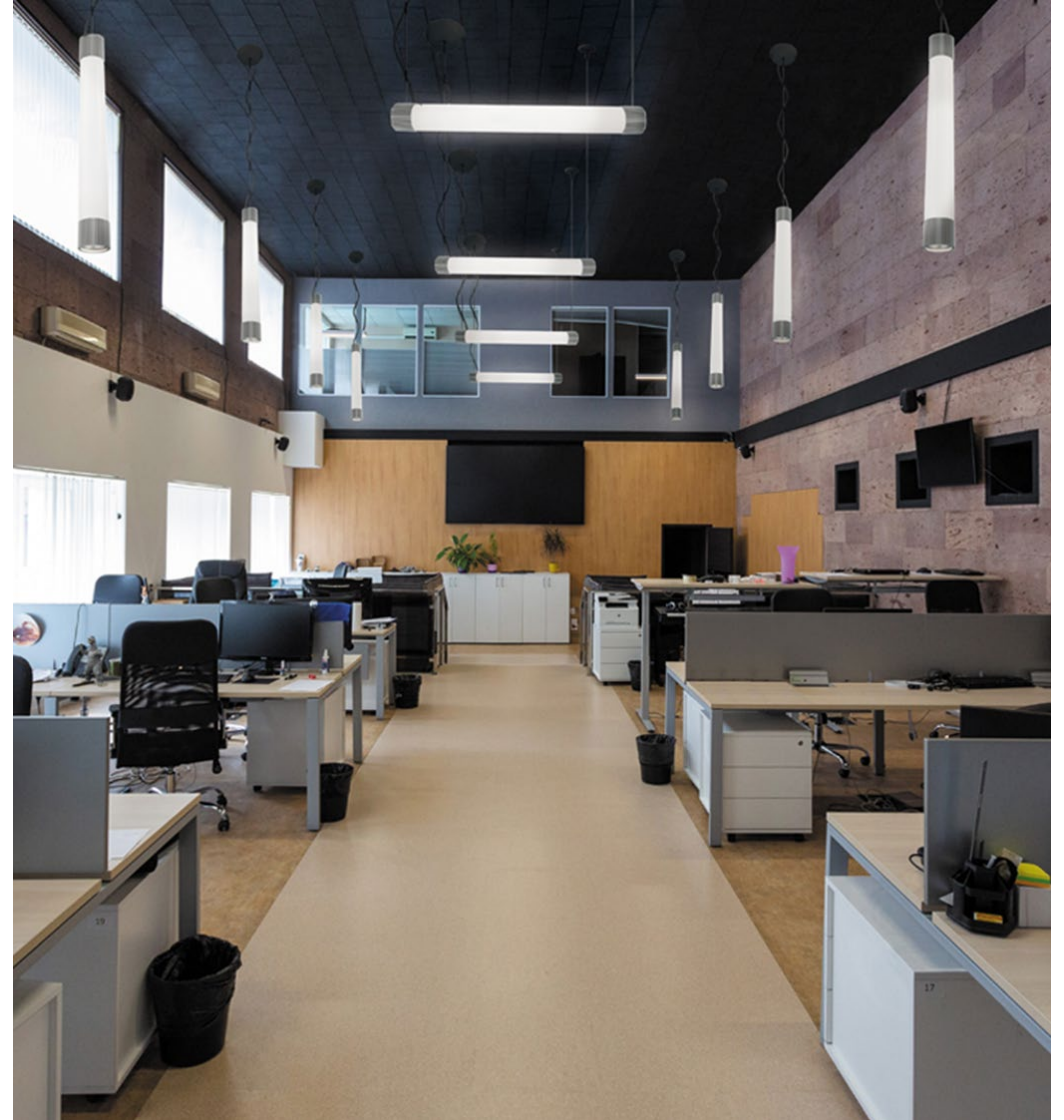

glo.stk.4.hrz™ 5-slider




construction

driver in remote enclosure:
constant current, programmable,
field maintainable, universal
input (120-277v), 0-10v
controllable to 1% dimming

optional: CDVR



mounts to 5"dia. steel
canopy in matte white
finish.

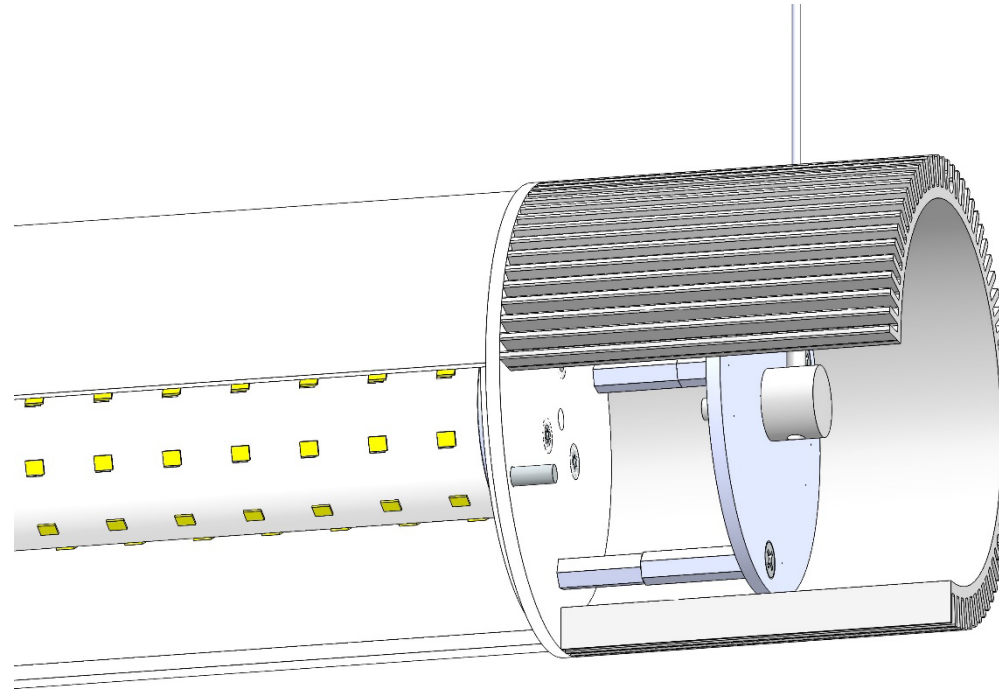

2-pt 3ft/6ft stainless steel
cables, field adjustable
grippers, exact desired
mounting height.
non power feed leg has 2"
matte white canopy.

.100" thick aluminum end
cap in matte white

90 cri flexible planar LED lighting sheet
wrapped around extruded aluminum
core provides totally even luminance


glo.stk.4.hrz™ 5-slider



performance

Statistics



Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
i.rod.4.hrz	+	29.1 fc	41.7 fc	22.0 fc	1.9:1	1.3:1

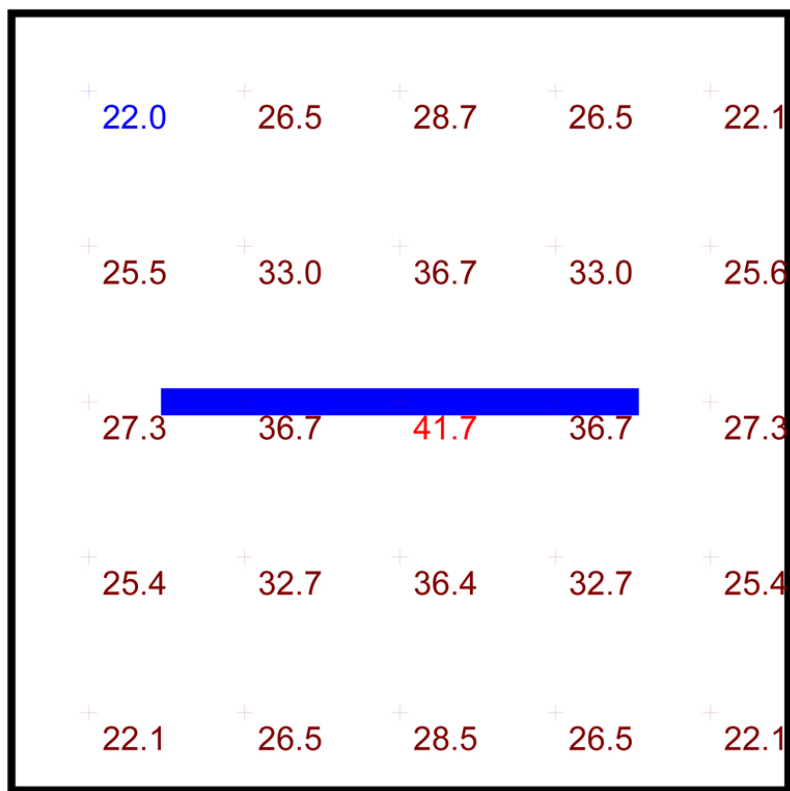

Plan View
Scale - 1" = 2ft

- 10' x 10' x 10'H space
- 80/50/20 reflectances
- bottom of fixture at 8' aff
- FC readings at 2.5' aff
- layout conducted using **90 cri P8672-HX 7500 lumens**



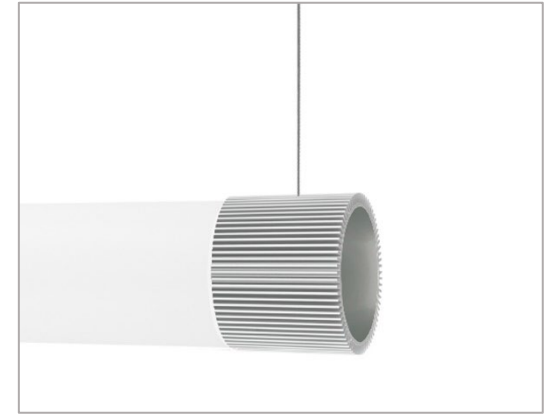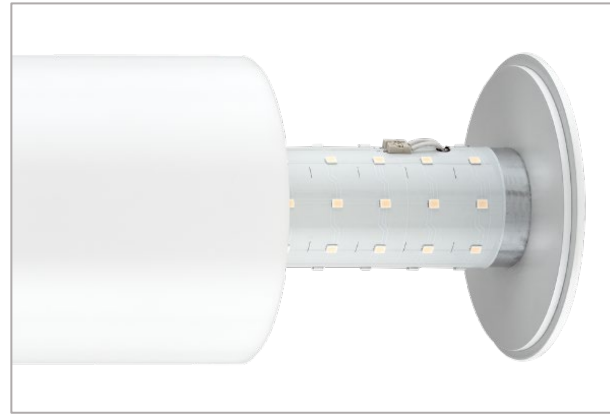

www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

glo.stk.4.hrz™ 5-slider

