



kupola™ 5-slider

your lighting rep has
recommended the **kupola™**
pendant for your project
Let's take a quick look:

sizes and lumens



- P1612 (12") / 1050 – 2100 lm
- P1616 (16") / 1590 – 3175 lm
- P1624 (24") / 2125 – 4450 lm



construction

constant current, programmable driver in canopy, universal input (120-277v), field maintainable, 0-10v controllable to 1% dimming

7" dia. spun aluminum 2-pc canopy housing driver

outer finish: choose from 15 standard powder coat paint finishes
+ custom RAL colors

inner finish: choose from 3 standard powder coat paint finishes



Select from black or white cord or colored cloth power cord in blue, orange, purple, red or white & gray dot

precision CNC spun .064" alum half- dome housing available in two-tone powder coat paint

custom LED board in 3000K, 3500K, 4000K, 90+ CRI standard


kupola™ 5-slider



performance

Statistics

Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
bul.it	+	25.7 fc	44.5 fc	17.9 fc	2.5:1	1.4:1

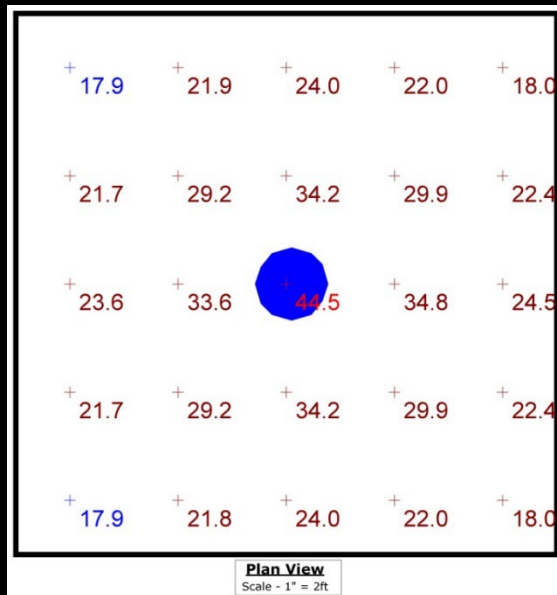

- 10' x 10' x 12'H space
- 80/50/20 reflectances
- fixture at 10' aff
- FC readings at 2.5' aff
- layout conducted using P1624 Hi lumen 90+ cri (4450 delivered lumens)





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

kupola™ 5-slider

