




mel.o.iii™ 5-slider

your lighting rep has
recommended the **mel.o.iii™**
pendant for your project
Let's take a quick look:

sizes and lumens

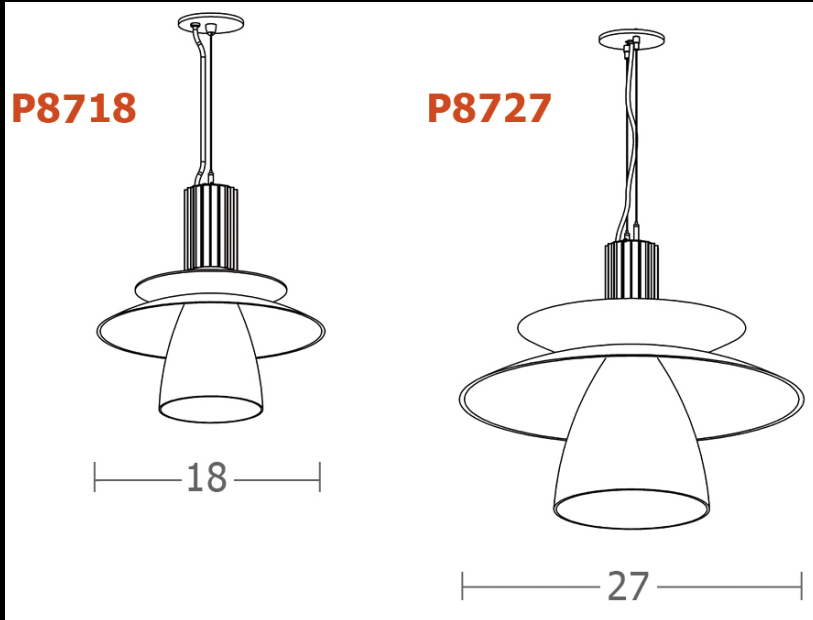

- P8718 (18") / 1535 – 3790 lm
- P8727 (27") / 1535 – 3790 lm




construction

integral programmable driver,
constant current , universal input
(120-277v), field maintainable, 0-
10v controllable to 1% dimming.

2 anodized finishes + 12 standard
powder coat paint finishes + custom
RAL colors

parabolic Satinice optimum
light diffusion acrylic
.125" P95 white acrylic top
convex diffuser
.187" P95 clear acrylic (light,
matte finish) concave dome.

5" dia. spun steel canopy with
single or dual field adjustable
stainless-steel cables

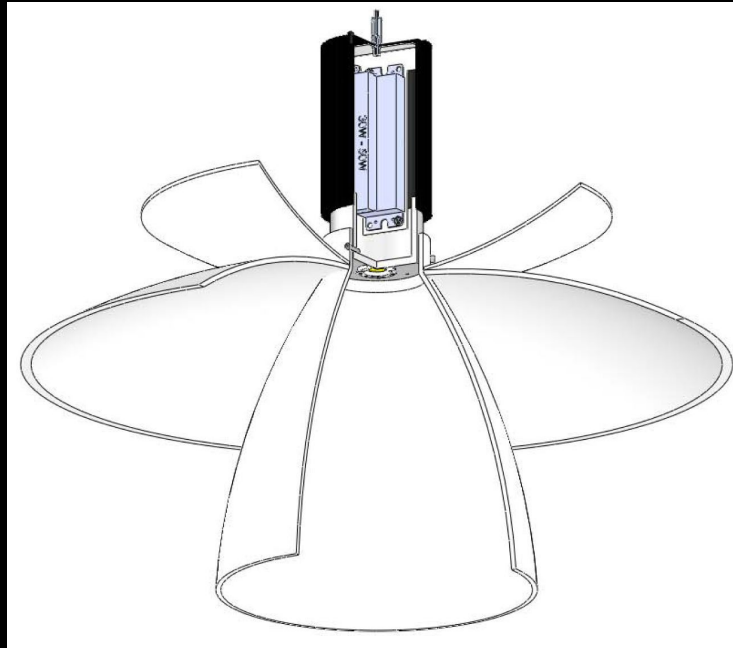

(POC) power over cable suspension
system **option** provides a clean look
without the need for a separate power
cord

optional colored cloth power
cord in blue, orange, purple,
red, or white & gray dot


single COB LED module in **90+**
CRI standard
2700K, 3000K, 3500K and
4000K.

optional frosted acrylic bottom
lens, solvent welded to bottom of
parabolic diffuser

performance

Statistics

Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
mel.o iii	+	16.7 fc	40.0 fc	6.3 fc	6.3:1	2.7:1

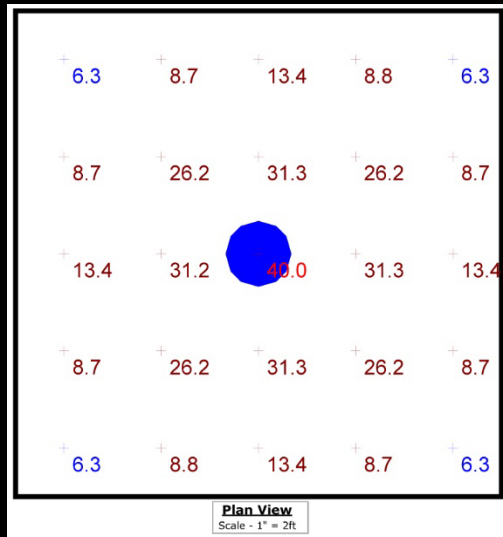

- 10' x 10' x 12'H space
- 80/50/20 reflectances
- bottom of fixture at 10' aff
- FC readings at 2.5' aff
- layout conducted using P8727 unit with HX lumen 90cri package providing 3790 delivered lumens





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

mel.o.iii™ 5-slider

