




wāf.r™ 5-slider

your lighting rep has
recommended the **wāf.r™**
pendant for your project
Let's take a quick look:

sizes and lumens

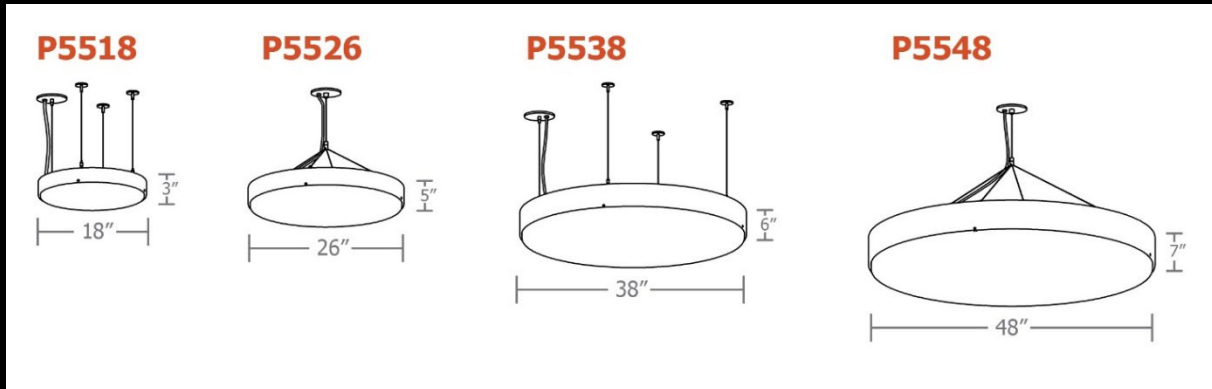

- P5518 (18") / 1330 – 4100 lm
- P5526 (26") / 2600 – 9700 lm
- P5538 (38") / 5150 – 19400 lm
- P5548 (48") / 7700 – 29100 lm



construction


metal core LED boards with Cree
90 CRI chips, mechanically held in
place for easy maintenance
3000K, 3500K, or 4000K

direct light distribution.
optional 10% up light

.050" aluminum reflector w/ high
reflectance (>92%) powder coat painted
high reflectance matte white finish

5" dia. spun steel canopy with
field adjustable stainless steel
4-point vertical suspension or
quadpod to single point

integral programmable drivers, field
maintainable, universal input (120-277v),
0-10v controllable to 1% dimming

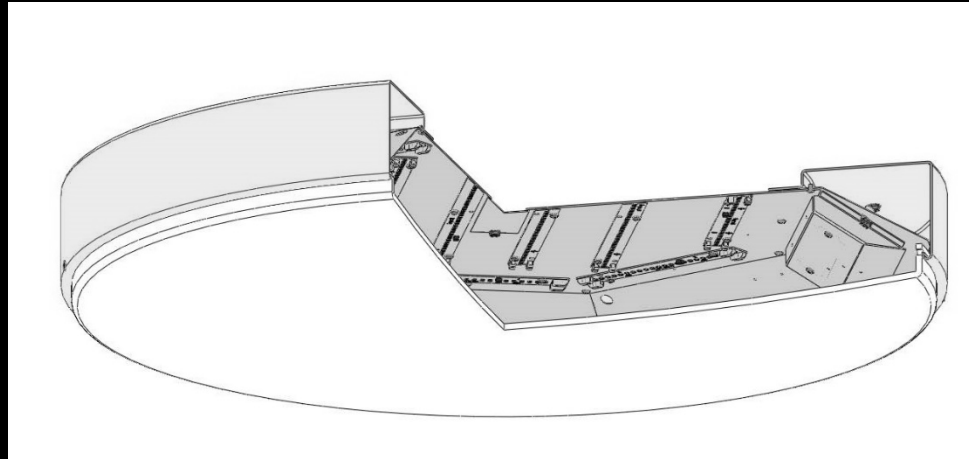

precision CNC spun .063"
aluminum housing w/rolled
bottom edge for added strength


15 standard powder
coat paint finishes
+ custom RAL colors

min .177" non-glare, light matte,
white acrylic diffuser

performance


Schedule						
Symbol	QTY	Manufacturer	Catalog Number	Description	Lamp	Wattage
	1	Impact Architectural Lighting	P5548 40 HX	48" dia. pendant waf.r luminaire	4000k 90cri LED	336

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
waf.r	+	40.2 fc	52.0 fc	29.1 fc	1.8:1	1.4:1

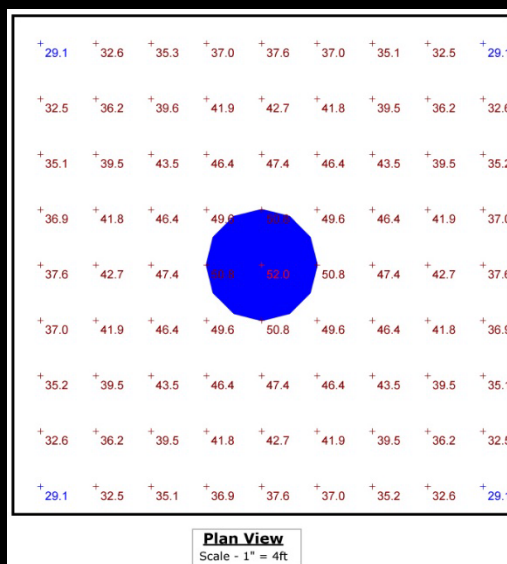

- 22' x 22' x 22'H space
- 80/50/20 reflectances
- bottom of fixture at 14' aff
- FC readings at 2.5' aff
- layout conducted using P5548 HX lumen package 90 cri (29100 delivered lumens)



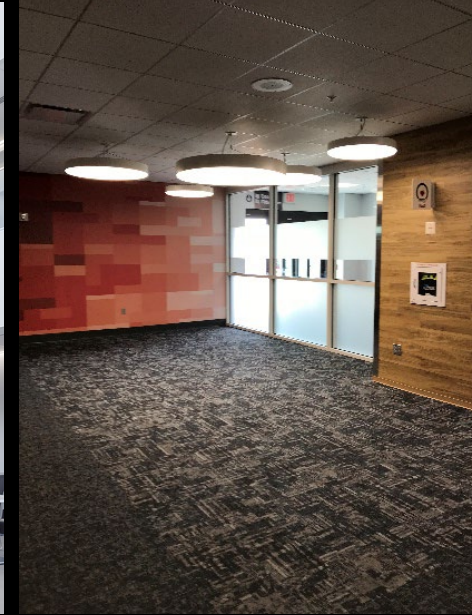

www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time