




waf.r™ 5-slider

your lighting rep has
recommended the **waf.r™**
pendant for your project
Let's take a quick look:




sizes and lumens


P5518




P5526



P5538



P5548



- P5518 (18") / 1170 – 3500 lm
- P5526 (26") / 2340 – 7020 lm
- P5538 (38") / 4180 – 13370 lm
- P5548 (48") / 5675 – 19120 lm




construction

metal core LED boards
mechanically held in place for
easy maintenance

5" dia. spun steel canopy with
field adjustable stainless steel
4-point vertical suspension or
quadpod to single point

integral programmable drivers, field
maintainable, universal input (120-277v),
0-10v controllable to 1% dimming.

direct light distribution.
optional 10% up light

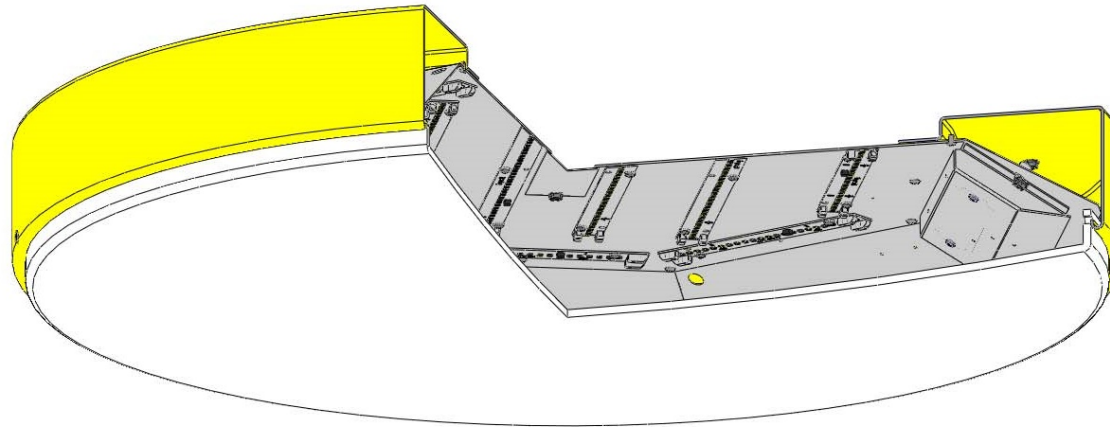

precision CNC spun .063"
aluminum housing w/rolled
bottom edge for added strength

.050" aluminum reflector w/ high
reflectance (>92%) powder coat painted
high reflectance matte white finish


21 standard powder
coat paint finishes
+ custom RAL colors

min .177" non-glare, light matte,
white acrylic diffuser

performance

Statistics

Description	Symbol	Avg	Min	Max/Min	Avg/Min	Max
waf.r	+	28.9 fc	17.4 fc	2.9:1	1.7:1	51.3 fc

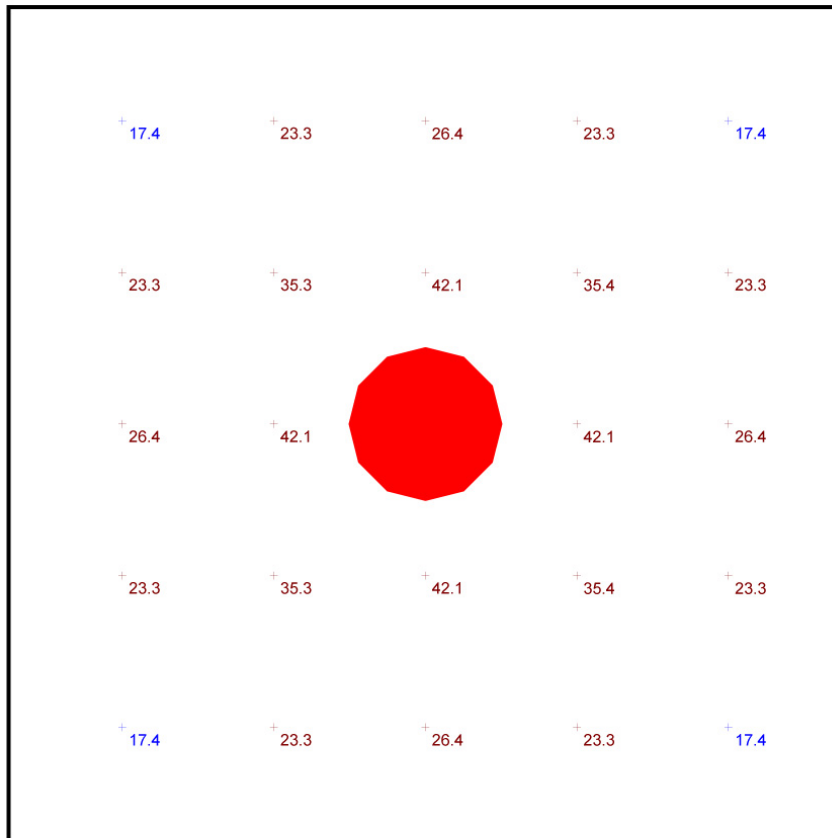


Plan View
Scale - 1" = 4ft

waf.r™ 5-slider

- 22' x 22' x 22'H space
- 80/50/20 reflectances
- bottom of fixture at 14' aff
- FC readings at 2.5' aff
- layout conducted using P5548 HI lumen package (19120 delivered lumens)



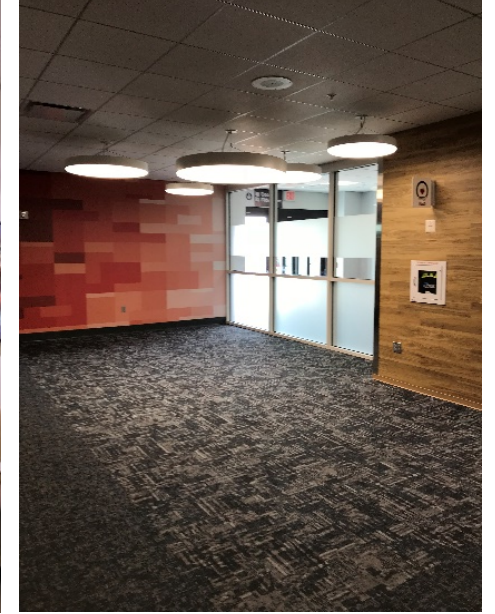

www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

waf.r™ 5-slider

