




ceiling mount
waf.r™ 5-slider

your lighting rep has recommended
the **ceiling mount waf.r™** for
your project
Let's take a quick look:



sizes and lumens

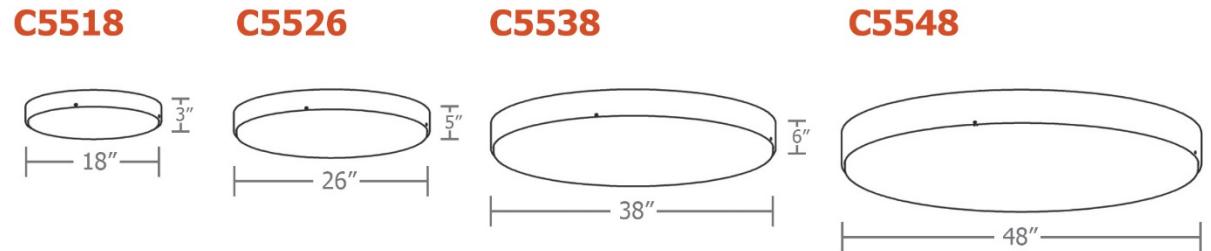

- C5518 (18") / 1170 – 3500 lm
- C5526 (26") / 2340 – 7020 lm
- C5538 (38") / 4180 – 13370 lm
- C5548 (48") / 5675 – 19120 lm

ceiling mount

waf.r™ 5-slider



construction


integral programmable drivers, constant current, universal input (120-277v), field maintainable, 0-10v controllable, 1% dimming.

mounts to standard 4-inch octagon junction box

direct light distribution

metal core LED boards mechanically held in place for easy maintenance

.050" aluminum reflector w/ high reflectance (>92%) powder coat paint matte white finish

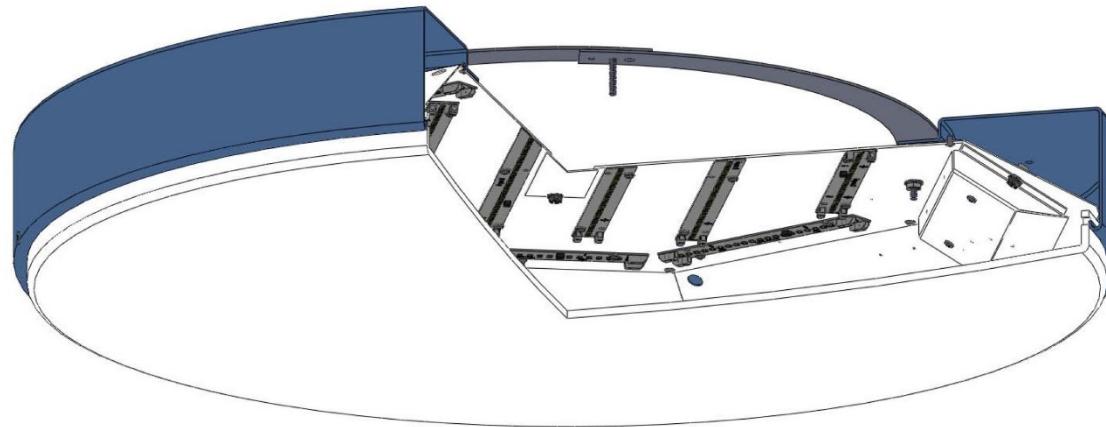

.177" optix® NG LM white acrylic lens

precision CNC spun .063" aluminum housing w/rolled bottom edge for added strength

21 standard powder coat paint finishes + custom RAL colors

ceiling mount


waf.r™ 5-slider



performance

Statistics

Description	Symbol	Avg	Min	Max/Min	Avg/Min	Max
ceiling waf.r	+	31.5 fc	19.6 fc	2.8:1	1.6:1	54.7 fc

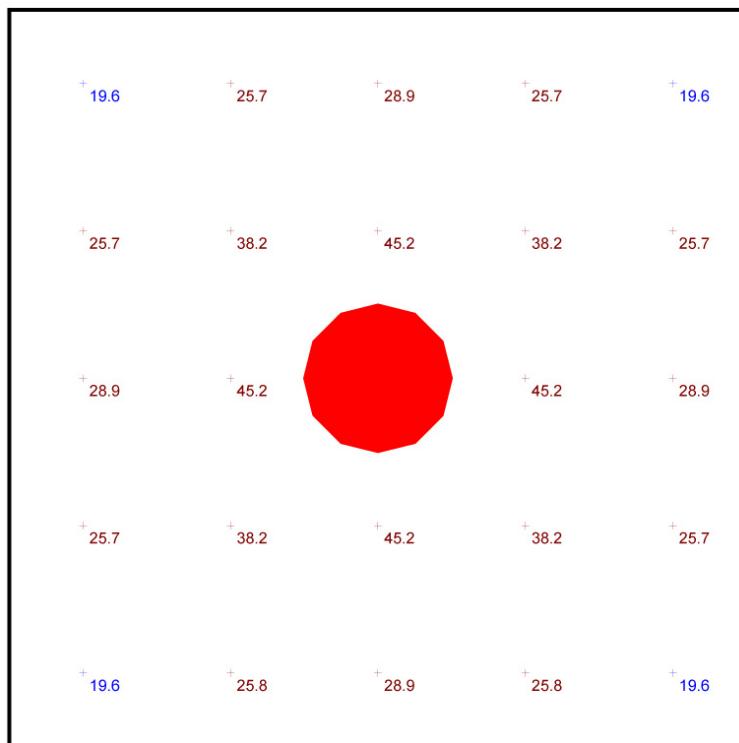

ceiling mount

waf.r™ 5-slider



- 20' x 20' x 14'H space
- 80/50/20 reflectances
- bottom of fixture at 13'5" aff
- FC readings at 2.5' aff
- layout conducted using C5548 HI lumen (19120 delivered lumens)





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

ceiling mount

waf.r™ 5-slider

