



tiki™ 5-slider

your lighting rep has recommended
the **tiki™** direct/indirect pendant
for your project
Let's take a quick look:

sizes and lumens



direct / (optional) indirect

- P5109 (9"): 995–2780 lm / 970 lm
- P5113 (13"): 1585–4120 lm / 775-1940 lm
- P5117 (17"): 2580–4985 lm / 775-2135 lm



construction

5" dia. mounting canopy with stainless steel cable tripod and field adjustable grippers for exact mounting height

dual COB direct/indirect light distribution w/ dual circuit option
2700K, 3000K, 3500K, 4000K,
90+ CRI

integral programmable drivers, field maintainable, universal input (120-277v),
0-10v controllable to 1% dimming

downlight portion either open,
or frosted flat acrylic lens




15 standard powder coat paint finishes
+ custom RAL colors

two-piece precision CNC spun .063" aluminum housing.
inverted bell upright element.
downlight housing with rolled bottom edge for added strength.

.050" spun aluminum conical reflector finished in high reflectance (>92%)
matte white powder coat

performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
tiki	+	25.5 fc	42.1 fc	14.9 fc	2.8:1	1.7:1

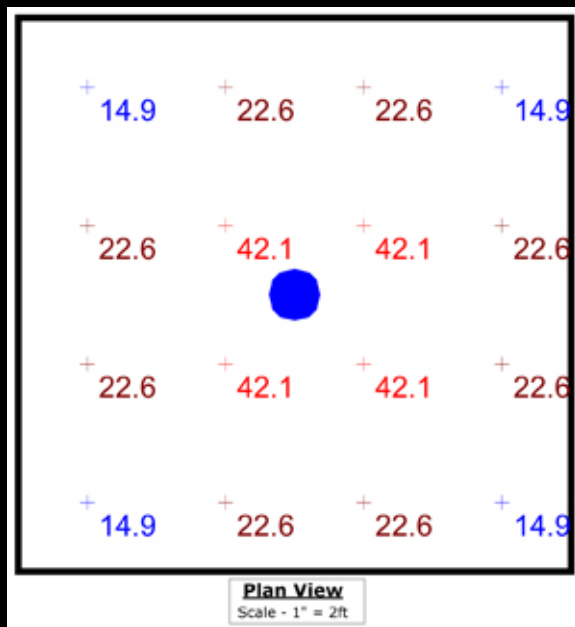

- 8' x 8' x 10'H space
- 80/50/20 reflectances
- bottom of fixture at 8' aff
- FC readings at 2.5' aff
- layout conducted using P5109 HX 90 cri 2780 direct and 970 indirect lumens





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time