


tiki™ 5-slider

your lighting rep has recommended  
the **tiki™** direct/indirect pendant  
for your project  
Let's take a quick look:



## sizes and lumens

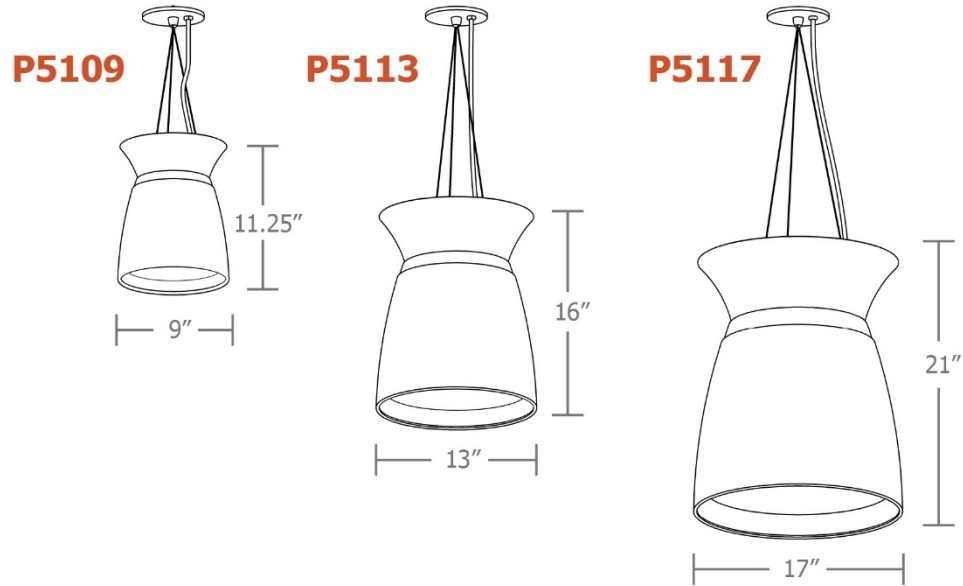

direct / (optional) indirect

- P5109 (9"): 1190–3333 lm / 1020 lm
- P5113 (13"): 1600–5000 lm / 850-2200 lm
- P5117 (17"): 2500–6000 lm / 850-2300 lm

tiki™ 5-slider






## construction

5" dia. mounting canopy with stainless steel cable tripod and field adjustable grippers for exact mounting height

dual COB direct/indirect light distribution w/ dual circuit option  
2700K, 3000K, 3500K, 4000K,  
80+ CRI or optional 90 CRI

integral programmable drivers, field maintainable, universal input (120-277v),  
0-10v controllable to 1% dimming

downlight portion either open, frosted lens, or decorative colored ring in amber, blue, frost, green, red, or yellow

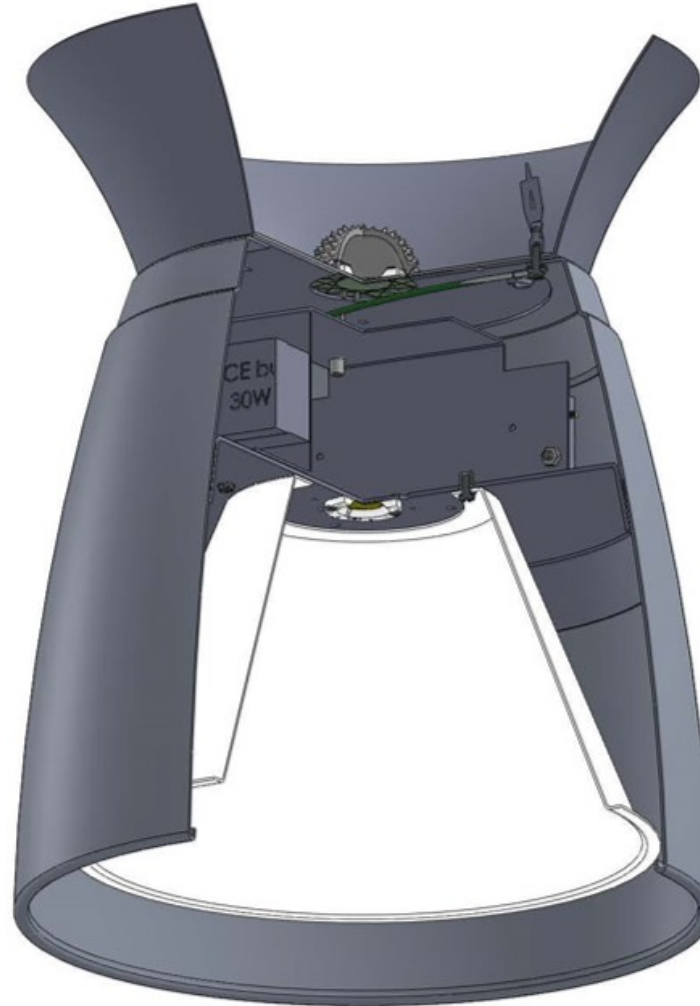

21 standard powder coat paint finishes  
+ custom RAL colors


two-piece precision CNC spun  
.063" aluminum housing.  
inverted bell upright element.  
downlight housing with rolled  
bottom edge for added strength.

.050" spun aluminum  
conical reflector finished  
in high reflectance (>92%)  
matte white powder coat

# performance

## Statistics

Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
tiki	+	25.2 fc	89.1 fc	8.8 fc	10.1:1	2.9:1

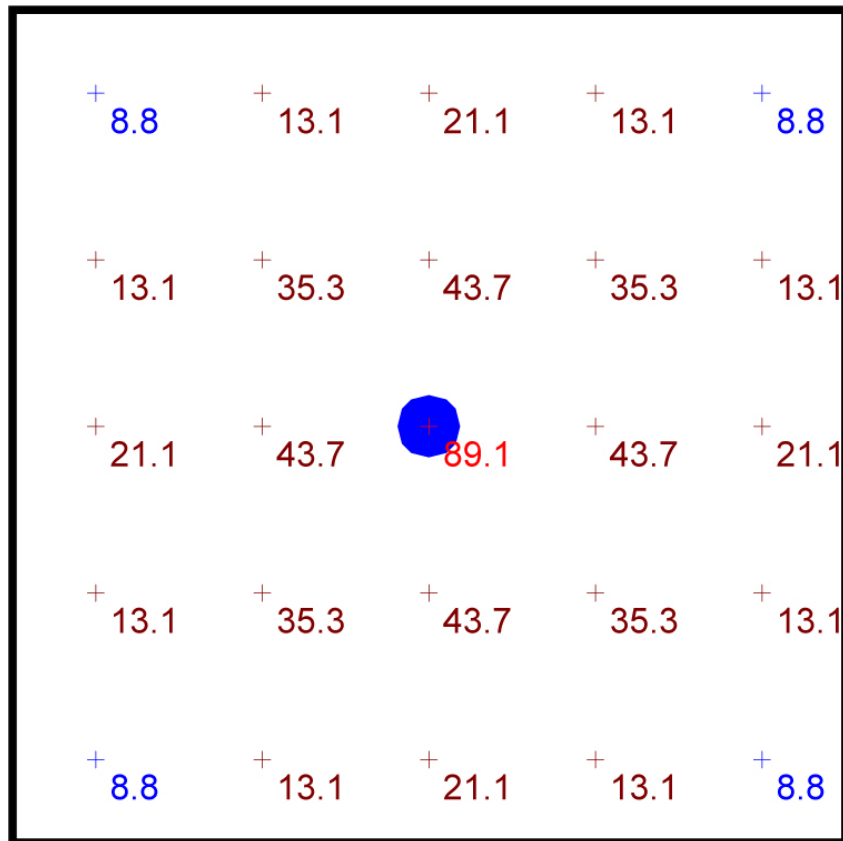

**Plan View**  
Scale - 1" = 2ft

- 10' x 10' x 10'H space
- 80/50/20 reflectances
- bottom of fixture at 8' aff
- FC readings at 2.5' aff
- layout conducted using P5109 HI lumen package (2380 direct/ 1082 indirect delivered lumens)





[www.impactltg.com](http://www.impactltg.com)

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

tiki™ 5-slider

