




ft.maxx™ 5-slider

your lighting rep has
recommended the **ft.maxx™**
pendant for your project
Let's take a quick look:




sizes and lumens

P7826

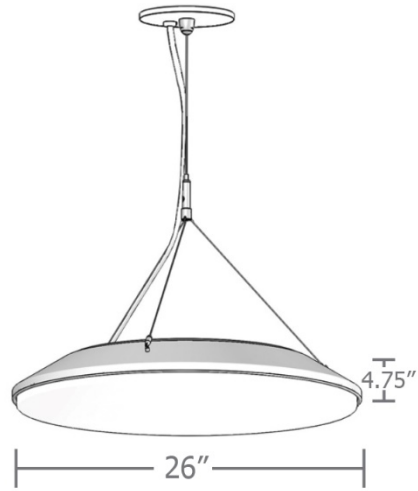

P7838

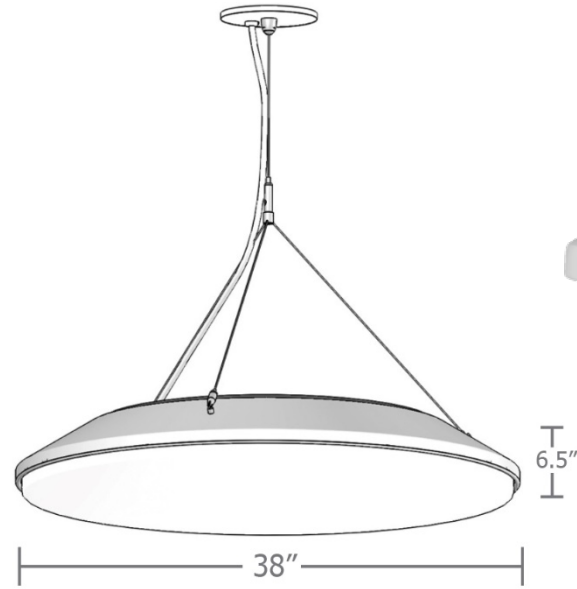

- P7826 (26") / 2340 – 7020 lm
- P7838 (36") / 4180 – 13370 lm

construction

integral programmable drivers constant current, field maintainable, universal input (120-277), 0-10v controllable to 1% dimming.

precision CNC spun .063" aluminum housing w/ rolled bottom edge for added strength


.050" aluminum array optics platform painted in high reflectance (>92%) matte white powder coat

subtle glow from .125" thick vibrant colored gloss acrylic top lens in one of four colors: blue, amber, red, or white

option for "no top lens" w/ 10% up light, includes clear hole plugs for debris-free lens

5" dia. spun steel mounting canopy w/ field adjustable stainless steel cables allowing for exact desired mounting height, sloped ceiling adapter standard

21 standard powder coat painted finishes + custom RAL colors

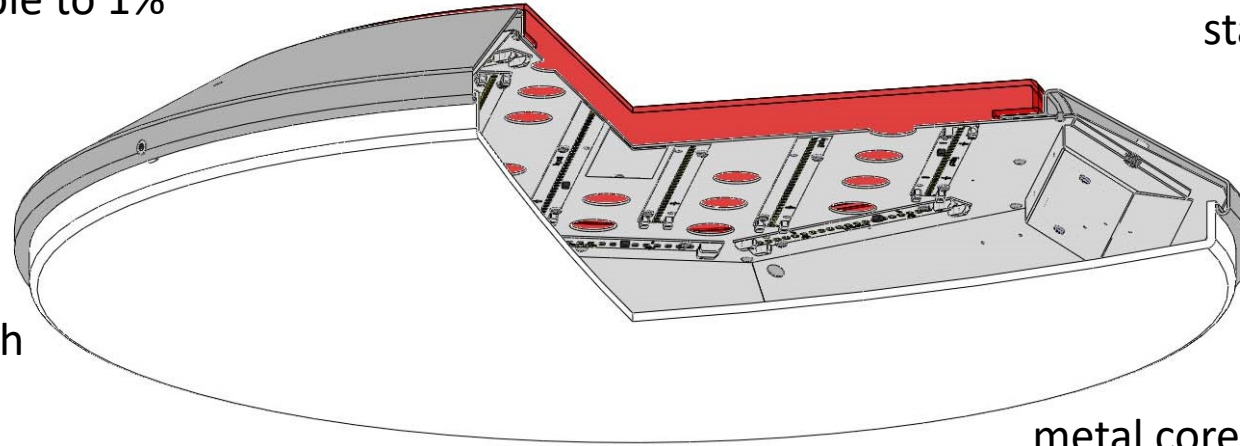


metal core LED boards mechanically held in place for simple field maintenance

bottom dome diffuser made from virgin matte white acrylic, secured by allen key set screws recessed into trim ring

performance

Statistics

Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
flt.maxx	+	49.4 fc	60.3 fc	40.8 fc	1.5:1	1.2:1

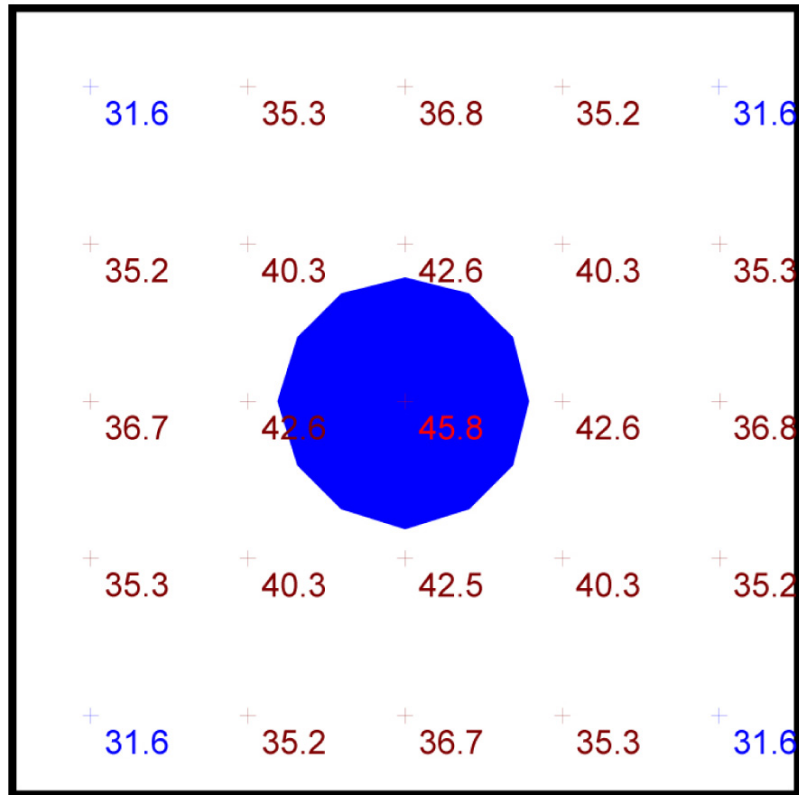

Plan View
Scale - 1" = 2ft




- 10' x 10' x 14'H space
- 80/50/20 reflectances
- bottom of fixture at 12' aff
- FC readings at 2.5' aff
- layout conducted using P7838 HI output (13370 delivered lumens)



Powder Coat Paint Finishes

MW matte white	CP champagne	YO yellow 1018
TW textured white	BZ bronze	RD red 3020
AP anodized paint	BS brass	BU blue 6017
SS satin silver	GM gun metal	OR orange 2011
TO textured gray	BR brick red	MN mint 6019
FB flat black	DN brown 3023	GR green 6018
SB satin black	MB military blue	PL purple 4005

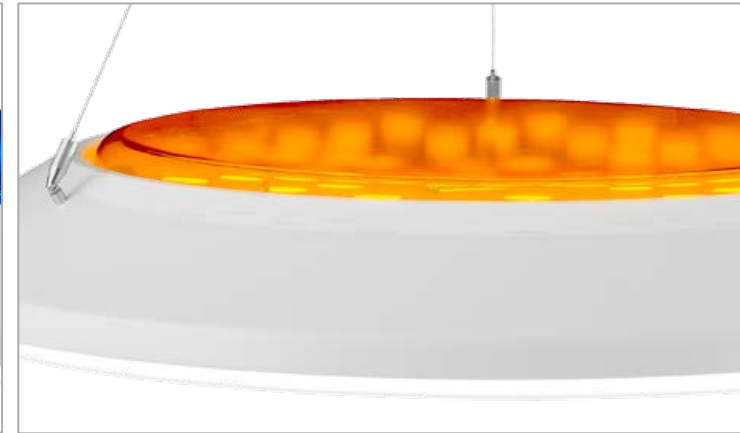

www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

flt.maxx™ 5-slider

