



bul.it.XL™ 5-slider

your lighting rep has
recommended the **bul.it.XL™**
pendant for your project
Let's take a quick look:

sizes and lumens



- P3324 (24") / 2000 – 5600 lm
- P3336 (36") / 2000 – 5600 lm



construction

(POC) power over cable
suspension system option
provides a clean look without the
need for a separate power cord

(supersized) when specifying,
please consider the fact that 36"
unit will not fit through a
standard door.

min. 42" opening required

.050" spun aluminum conical
reflector optics chamber finished in
high reflectance (>92%) matte white
powder coat

integral programmable driver, universal
input (120-277v), field maintainable,
0-10v controllable to 1% dimming.



open bottom, frosted acrylic flat
lens, or open with decorative
colored ring in amber, blue, frost,
green, red, or yellow

5" dia. spun steel canopy with
field adjustable tripod stainless
steel cables

optional colored cloth power
cord in blue, orange purple, red,
or white/gray dot

single COB LED module in
90+ CRI standard
3000K, 3500K and 4000K

precision CNC spun .080"
aluminum parabolic housing with
bottom edge for added strength

15 standard powder
coat paint finishes
+ custom RAL colors


bul.it.XL™ 5-slider



performance

Schedule						
Symbol	Quantity	Manufacturer	Catalog Number	Description	Lamp	Wattage
	1	Impact Architectural Lighting	P3336 40HX	36" dia. pendant bul.it.XL luminaire w/ open bottom	4000k 90cri LED	63

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
bul.it.XL		29.7 fc	46.3 fc	15.9 fc	2.9:1	1.9:1

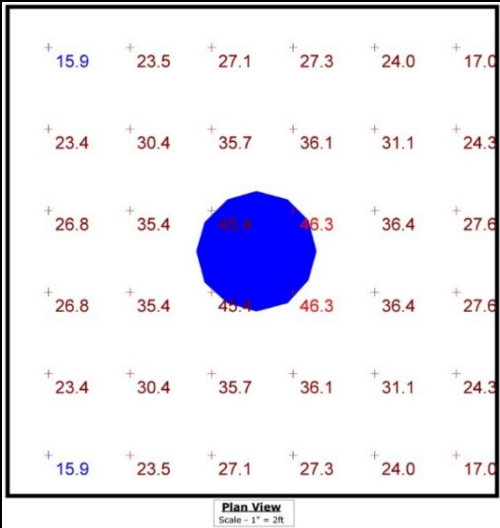

- 12' x 12' x 20'H space
- 80/50/20 reflectances
- bottom of fixture at 14' aff
- FC readings at 2.5' aff
- layout conducted using P3336 HX output 90 cri (5600 delivered lumens)





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

bul.it.XL™ 5-slider

