




dol.up™ 5-slider

your lighting rep has
recommended the **dol.up™**
pendant for your project
Let's take a quick look:

sizes and lumens

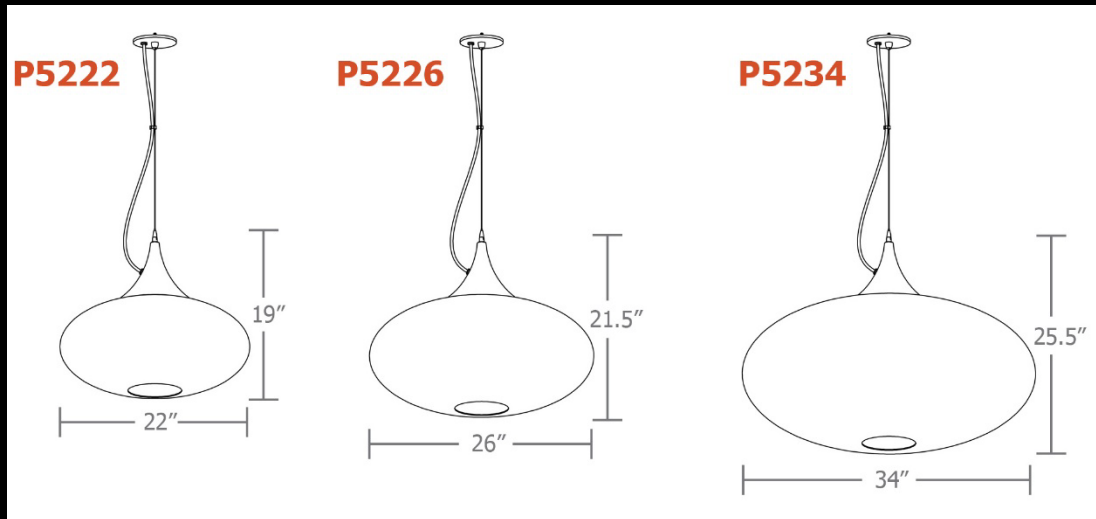

- P5222 (22") / 1305– 2080 lm
- P5226 (26") / 2080 – 2675 lm
- P5234 (34") / 2080 – 3265 lm

downlight
up to 1300 lm

dol.up™ 5-slider




construction

integral constant current driver, field maintainable, universal input (120-277v), 0-10v controllable to 1% dimming

flexible planar 90+ cri LED lighting sheet wrapped around cylinder core provides totally even luminance

if no downlight is specified, bottom acrylic white disk with finial is provided

mounts to standard 4" octagon junction box via single 12ft stainless steel cable with field adjustable gripper, allowing for exact desired mounting height

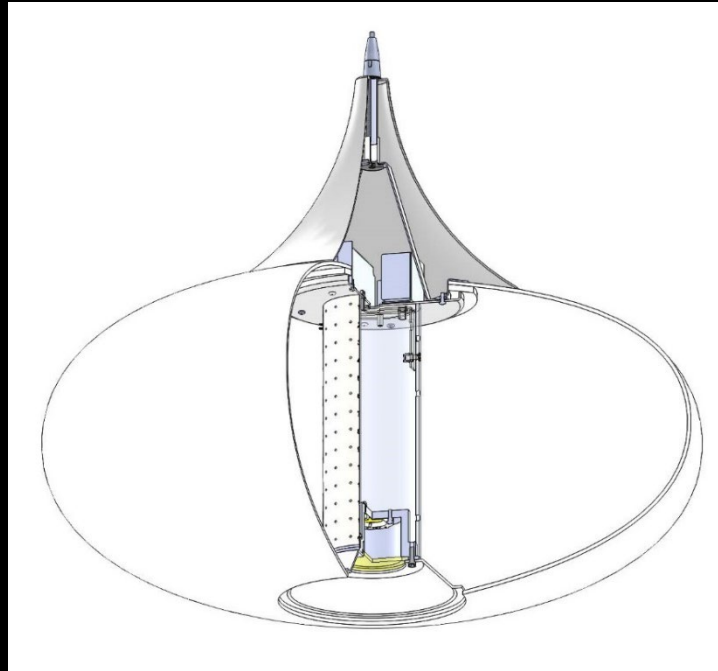


15 standard powder coat paint finishes + custom RAL colors available on the spun aluminum trumpet


two-piece hemisoidal gloss-white virgin acrylic diffuser with polished seam at equator

optional downlight

performance

Schedule						
Symbol	QTY	Manufacturer	Catalog Number	Description	Lamp	Wattage
	1	Impact Architectural Lighting	P5226 40HI 40LO	26" dia. pendant dol.up w/ integral downlight	4000k 90cri LED	48

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
dol.up	+	22.1 fc	37.7 fc	13.5 fc	2.8:1	1.6:1

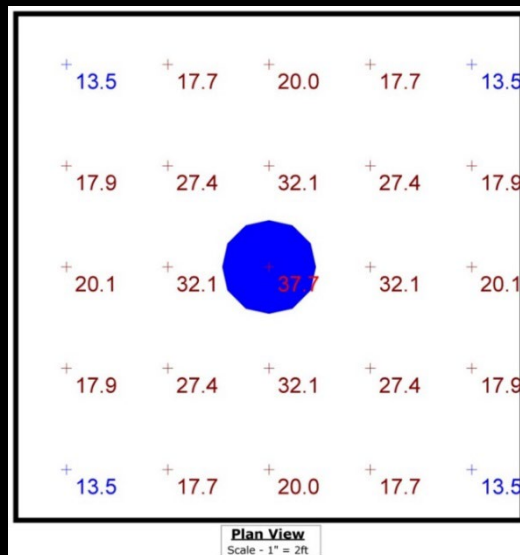

- 10' x 10' x 10'H space
- 80/50/20 reflectances
- bottom of fixture at 8' aff
- FC readings at 2.5' aff
- layout conducted using P5226 HI 90 cri lumen package (2670 del. lumens) w/ downlight (1300 del. lumens)





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time