




i.drop™ 5-slider

your lighting rep has
recommended the **i.drop™**
pendant for your project
Let's take a quick look:



sizes and lumens

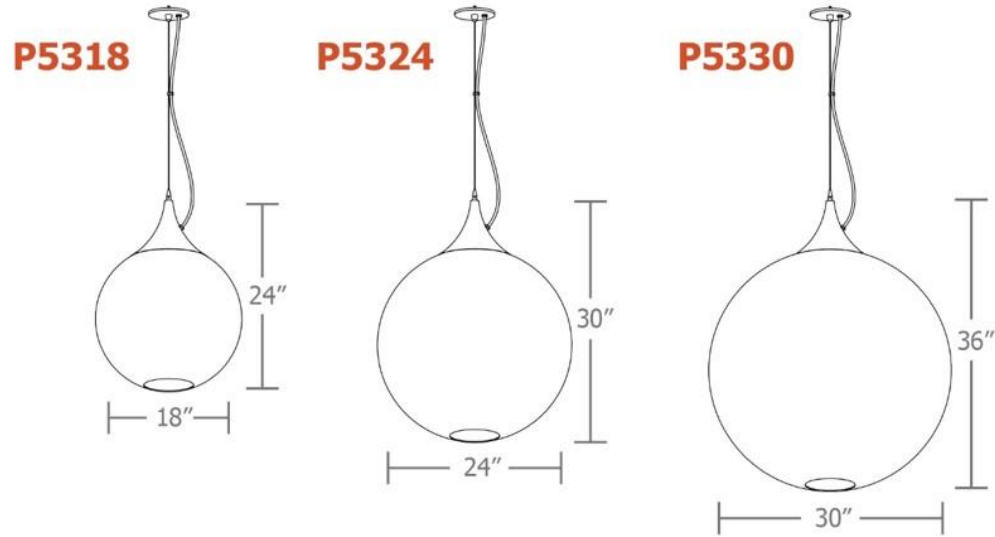

- P5318 (18") / 1305 – 2080 lm
- P5324 (24") / 2080 – 2675 lm
- P5330 (30") / 2080 – 3265 lm

downlight
1300 lm




construction

integral constant current driver, field maintainable, universal input (120-277v), 0-10v controllable to 1% dimming.

mounts to standard 4" octagon junction box via single 6ft or 12ft stainless steel cable with field adjustable gripper allowing for exact desired mounting height

flexible planar LED lighting sheet wrapped around cylinder core provides even illumination
90+cri
3000K, 3500K, or 4000K

if no downlight is specified, white acrylic bottom lens with flat cap is provided

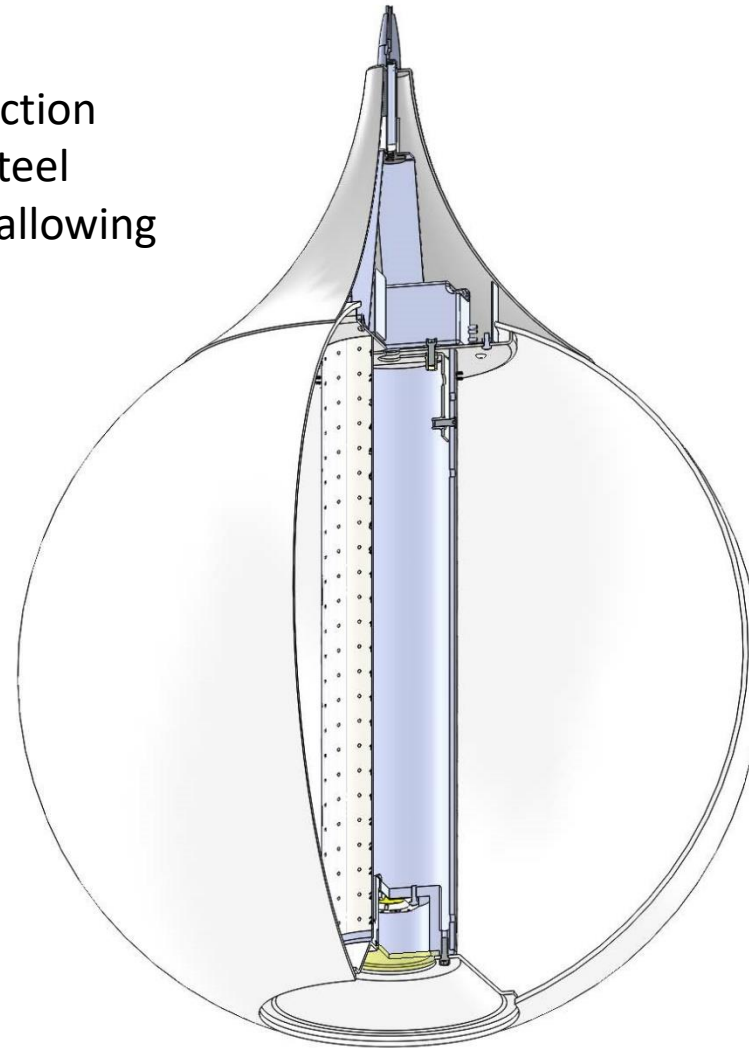



15 standard powder coat finishes + custom RAL colors available on the spun aluminum trumpet


globe-shaped gloss-white virgin acrylic diffuser: 18" seamless, 24"/30" equator seam ground smooth and polished

optional downlight

performance

Schedule						
Symbol	QTY	Manufacturer	Catalog Number	Description	Lamp	Wattage
	1	Impact Architectural Lighting	P5330 40 HI 40 LO	30" dia. pendant i.drop w/ integral downlight	4000k 90cri LED	50

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
i.drop		21.3 fc	24.8 fc	18.1 fc	1.4:1	1.2:1

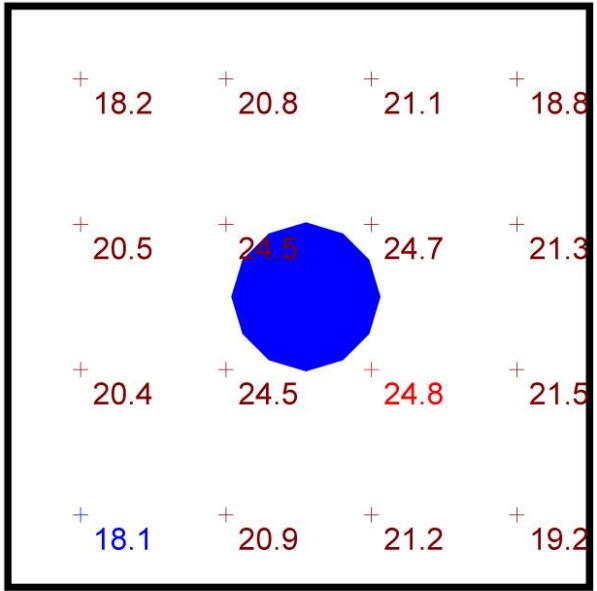

Plan View
Scale - 1" = 2ft

- 10' x 10' x 13'H space
- 80/50/20 reflectances
- bottom of fixture at 8' aff
- FC readings at 2.5' aff
- layout conducted using P5330 HI lumen package 90 cri (3265 delivered lumens) w/ downlight (1300 delivered lumens)





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

i.drop™ 5-slider

