




glo.stk.4™ 5-slider


your lighting rep has
recommended the **glo.stk.4™**
cylinder pendant for your project
Let's take a quick look:



sizes and lumens

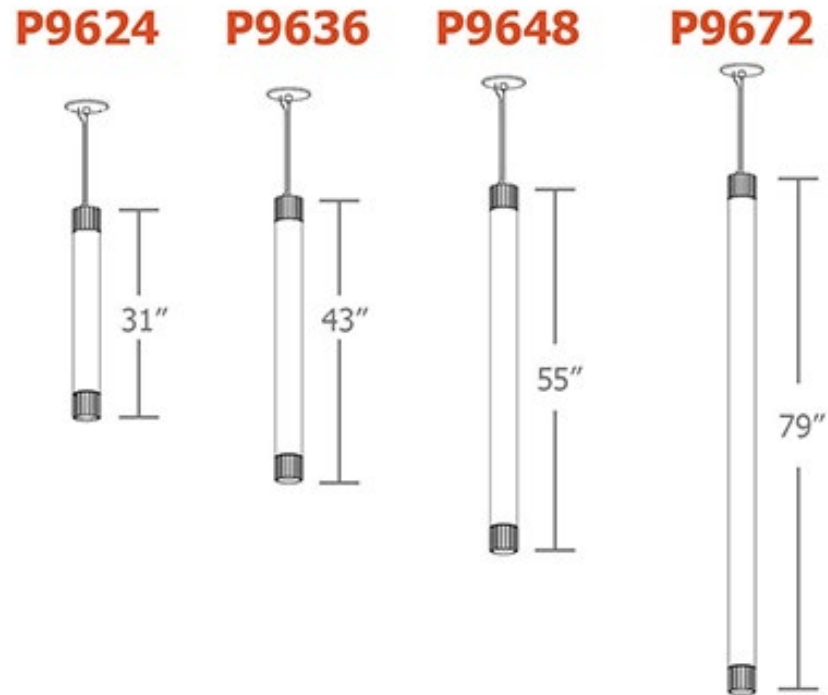


- P9624 (31") / 940 – 3200 lm
- P9636 (43") / 1400 – 4500 lm
- P9648 (55") / 1900 – 6450 lm
- P9672 (79") / 3000 – 9100 lm

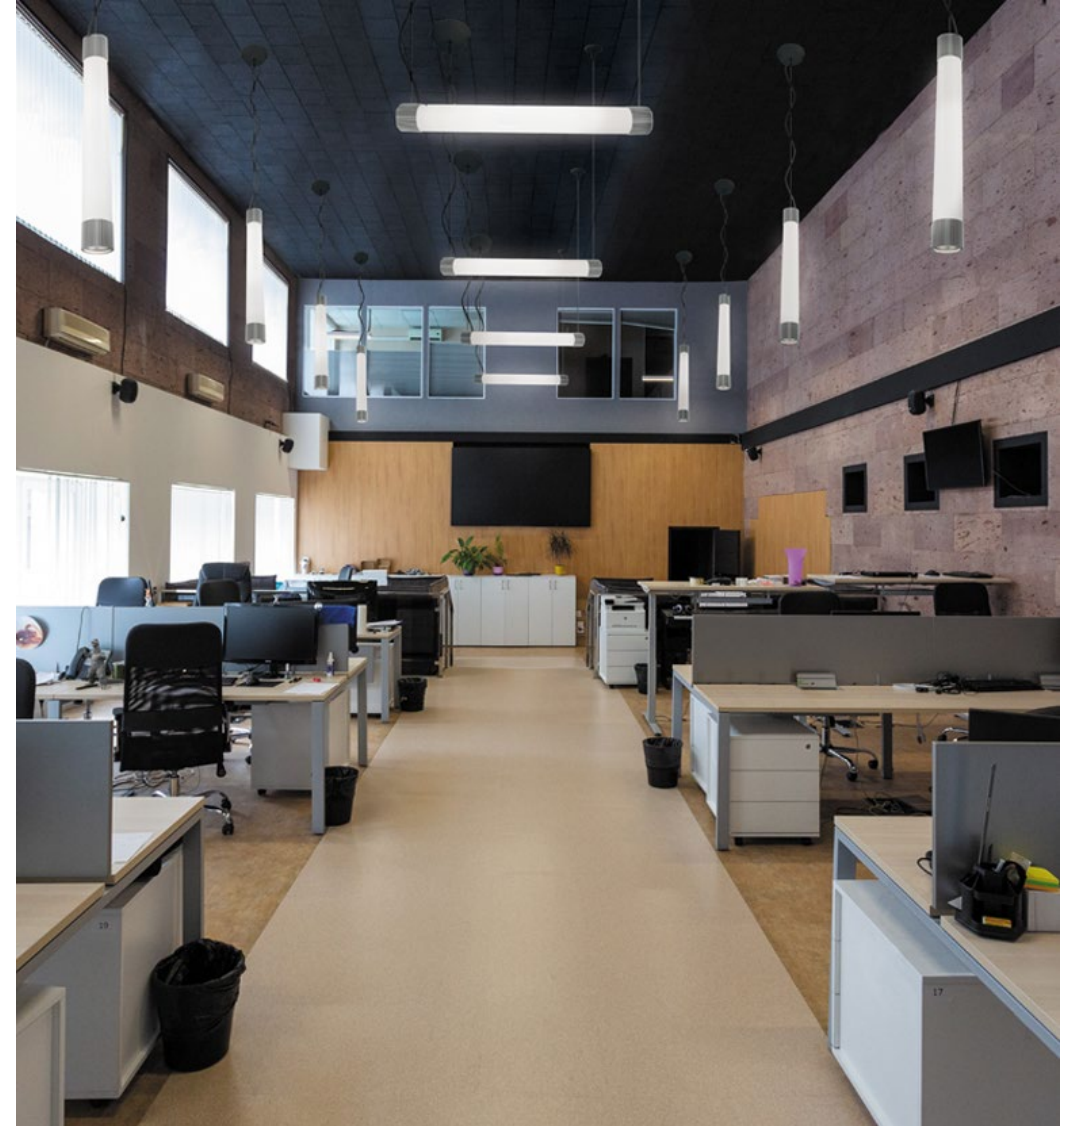

construction

mounts to 5" dia. steel canopy in matte white finish. single 6ft or 12ft stainless steel cable. adjustable gripper allows for exact desired mounting height

ribbed extruded aluminum end caps available in silver anodized, black anodized or 12 std powder coat paints

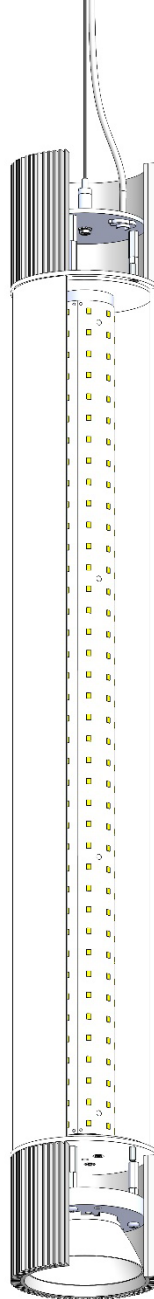

remote driver enclosure with constant current driver, field maintainable, universal input (120-277), 0-10v controllable to 1% dimming


optional: CDVR



90 cri flexible planar LED lighting sheet wrapped around extruded aluminum core provides totally even luminance

performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
i.rod.4	+	16.0 fc	17.0 fc	10.4 fc	1.6:1	1.5:1

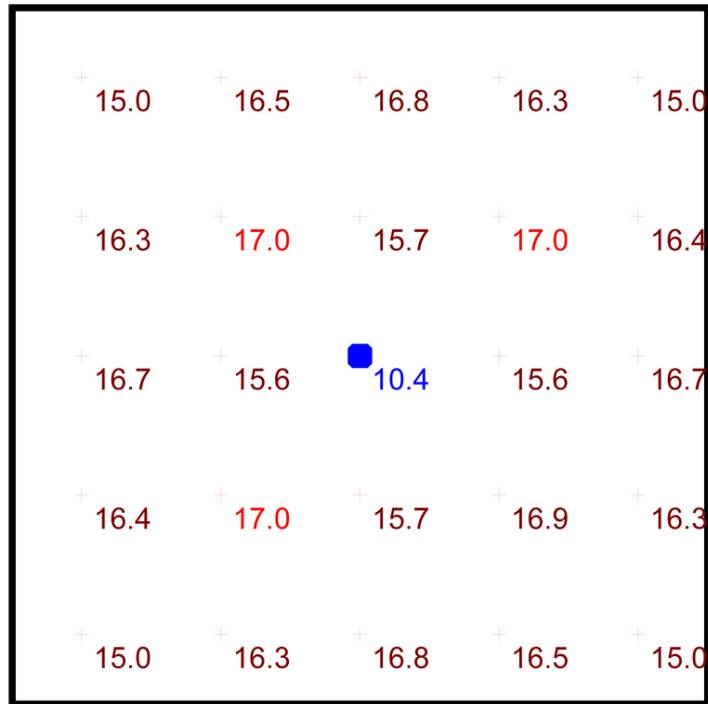

Plan View
Scale - 1" = 2ft

- 10' x 10' x 10'H space
- 80/50/20 reflectances
- bottom of fixture at 8' aff
- FC readings at 2.5' aff
- layout conducted using **90 cri P9672-HX 7500 lumens output unit**





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

glo.stk.4™ 5-slider

