




ceiling mount
mere™ 5-slider

your lighting rep has recommended
the **ceiling mount mere™**
fixture for your project
Let's take a quick look:



sizes and lumens

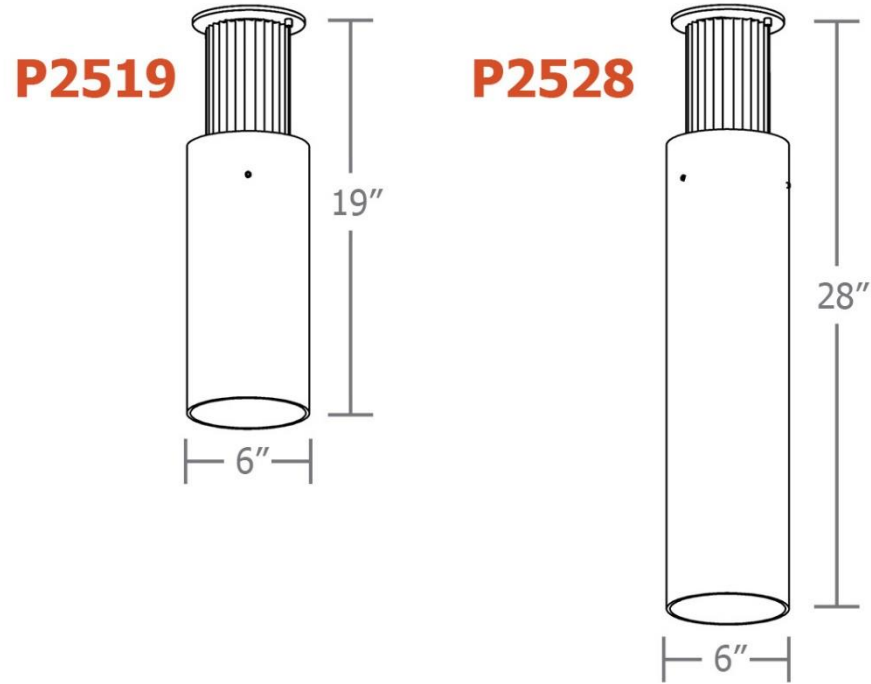

- C2519 (19") / 1535 – 3790 lm
- C2528 (28") / 1535 – 3790 lm



ceiling mount
mere™ 5-slider



construction

integral programmable driver, constant current,
universal input (120-277v), field maintainable,
0-10v controllable, 1% dimming.

6" dia. cylindrical open bottom
P95 white acrylic diffuser



mounts to standard 4"
octagon junction box

2 anodized finishes + 12 standard
powder coat paint finishes
+ custom RAL colors

single COB LED module
in **90+** CRI standard
2700K, 3000K, 3500K,
and 4000K


optional frosted acrylic bottom lens, solvent
welded to bottom of cylindrical diffuser

ceiling mount
mere™ 5-slider



performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
mere.ceiling	+	17.7 fc	30.0 fc	11.0 fc	2.7:1	1.6:1

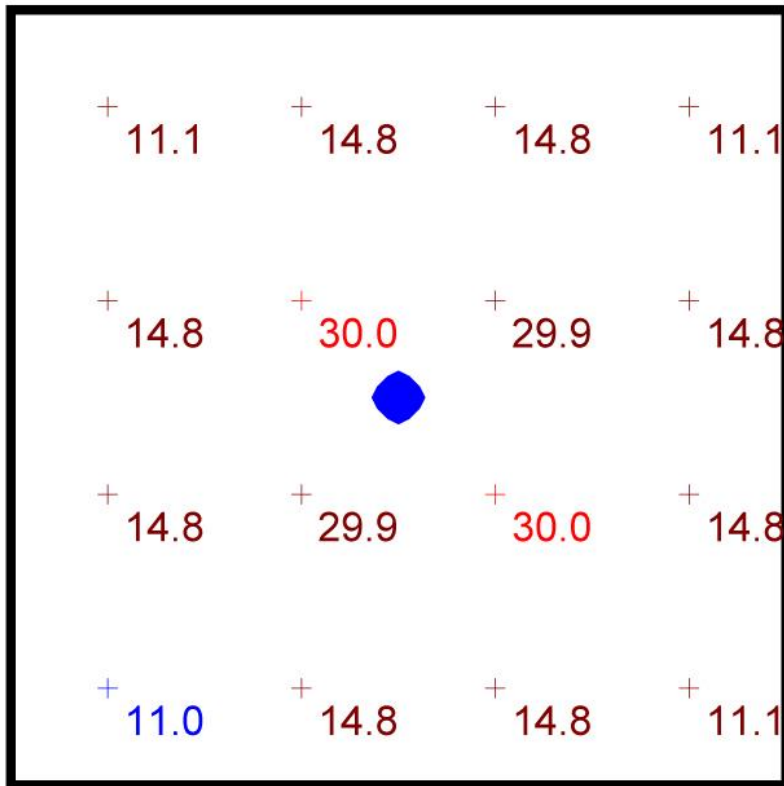

Plan View
Scale - 1" = 2ft

- 8' x 8' x 10'H space
- 80/50/20 reflectances
- bottom of fixture at 8.5' aff
- FC readings at 2.5' aff
- layout conducted with HI lumen 90 CRI package providing 2980 delivered lumens



ceiling mount
mere™ 5-slider





www.impactltg.com

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

ceiling mount
mere™ 5-slider

