




ceiling mount  
**mere™ 5-slider**

your lighting rep has recommended  
the **ceiling mount mere™**  
fixture for your project  
Let's take a quick look:



## sizes and lumens

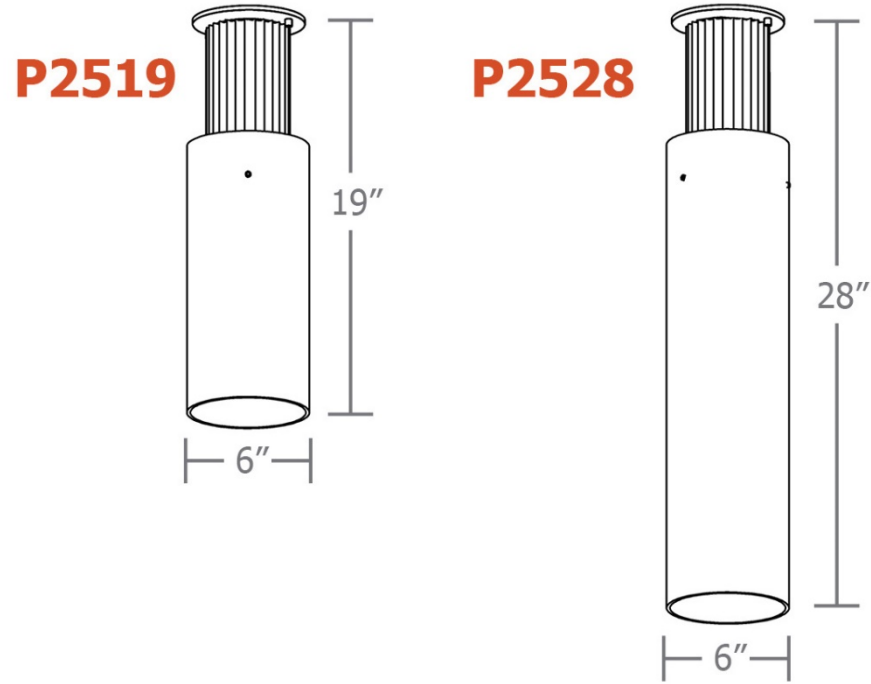

- C2519 (19") / 1660 – 4100 lm
- C2528 (28") / 1660 – 4100 lm



ceiling mount  
mere™ 5-slider



## construction

integral programmable driver, constant current,  
universal input (120-277v), field maintainable,  
0-10v controllable, 1% dimming.

6" dia. cylindrical open bottom  
P95 white acrylic diffuser



mounts to standard 4"  
octagon junction box

2 anodized finishes, 18 standard  
powder coat paint finishes  
+ custom RAL colors

single COB LED module in 80+ CRI  
standard or optional 90 CRI  
2700K, 3000K, 3500K, and 4000K


optional frosted acrylic bottom lens, solvent  
welded to bottom of cylindrical diffuser

ceiling mount  
**mere™ 5-slider**



# performance

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
ceiling mount mere	+	13.2 fc	48.3 fc	8.4 fc	5.8:1	1.6:1

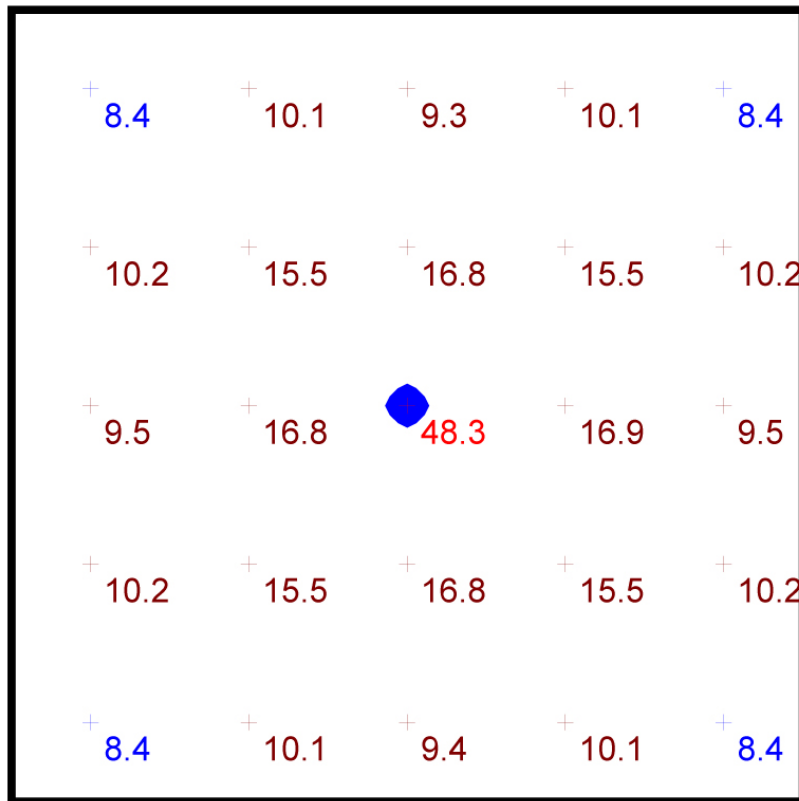

**Plan View**  
Scale - 1" = 2ft

- 10' x 10' x 10'H space
- 80/50/20 reflectances
- bottom of fixture at 7'8" aff
- FC readings at 2.5' aff
- layout conducted using P2528 HI output (3200 delivered lumens)



ceiling mount  
**mere™ 5-slider**





Powder Coat Paint Finishes

MW matte white	CP champagne	YO yellow 1018
TW textured white	BZ bronze	RD red 3020
AP anodized paint	BS brass	BU blue 5017
SS satin silver	GM gun metal	OR orange 2011
TG textured gray	BR brick red	MN mint 6019
FB flat black	BN brown 8023	GR green 6018
SB satin black	MB military blue	PL purple 4005



[www.impactltg.com](http://www.impactltg.com)

- spec sheet and color chart
- photometric files and BIM models
- built to order in Saint Louis, MO, USA
- 4-week lead time

ceiling mount  
mere™ 5-slider

