

job name:
 type:

6"/12" rok.it™ spec sheet 90CRI

material

acoustic fin

polyethylene terephthalate (PET) 12mm thick made from recycled material. 14 color options available. NRC rating: 0.25-0.75. Fireproof Level: B1

LED

body illumination

flexible planar LED lighting sheet in 3000K, 3500K, or 4000K (90CRI), utilizing emitters rated at >77,000hrs L₇₀ per TM21-11 from LM80 data. white power cord standard.

end caps

comprised of two graduated diameter .100" thick aluminum plates. designed to center the acrylic diffuser and block light leaks. powder coat painted matte white. bottom end cap features no visible hardware.

driver (remote)

programmable, class 2, class P universal input (120-277v), constant current, 0-10v dimming, 1% minimum dimming level. remote driver enclosure standard. consult factory for distances over 33 feet.

diffuser

4" dia. .118" Satinice white acrylic cylinder, featuring light diffusion beads evenly distributed throughout the material for optimum light diffusion.

mounting

5" matte white canopy. single stainless steel cable and field adjustable gripper that allows for exact AFF mounting heights. white power cord standard.

CDVR (optional)

7" dia. spun .064" aluminum canopy in matte white for surface mounted driver.

emergency

recommend use of inverter (by other).
 optional WREM: wired for remote EM battery (by other).





catalog number



size	fin shape	fin color	body illumination	options
		designer	CCT lumens	
P1906.LV 4" dia X 6" ht light engine (9" od X 18" oah with BD) (9" od X 18" oah with SW) (13.5" od X 18" oah with DR)	BD blade	SBA sesame black	30 3000K LO 400 lm	6FT 72" cable
	SW swoop	SGA silver gray	35 3500K HI 740 lm	12FT 144" cable
	DR dart	PCA peacock	40 4000K	SBPC silver braid power cord and white canopy
		OCA ocean		CDVR surface-mounted driver canopy
		SDA sand dune	30 3000K LO 995 lm	WREM wired for remote EM battery pack (by other) (see note above)
		CFA coffee	35 3500K HI 1400 lm	ELD EldoLED*
		SWA seaweed	40 4000K	LUT Lutron* *consult factory
		primary		
		RDA red		
		ORA orange		
P1912.LV 4" dia X 12" ht light engine (9" od X 18" oah with BD) (9" od X 18" oah with SW) (13.5" od X 18" oah with DR)		OYA orange yellow		
		GRA green		
		SKA sky blue		
		BUA blue		
		PRA purple		

see pg 3 for color chart



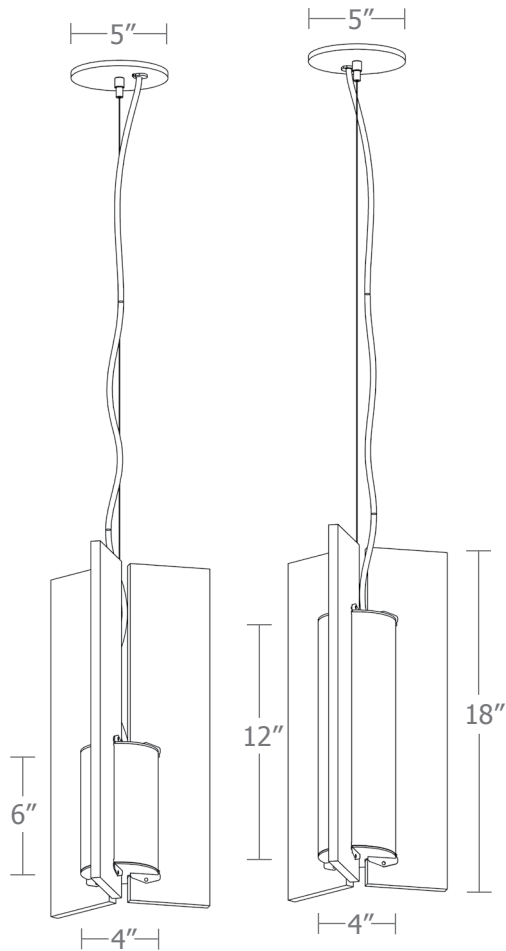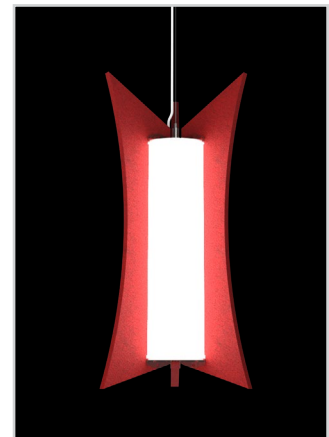

Acoustic Colors

designer		primary	
	SBA sesame black		RDA red
	SGA silver gray		ORA orange
	PCA peacock		OYA orange yellow
	OCA ocean		GRA green
	SDA sand dune		SKA sky blue
	CFA coffee		BUA blue
	SWA seaweed		PRA purple